


**SPECIFICATIONS**

Frequency Range:	DC~67 GHz
Input Avg Power:	2W@25°C, 0.5W@125°C
Peak Power:	200W
Impedance:	50 Ohms
Attenuation:	1-20dB
VSWR:	1.45 max.
Connector:	1.85mm-Male and 1.85mm-Female
Operating Temp.:	-55°C~+125°C
Connector Body:	Stainless Steel
Female Center Contact:	Gold plated beryllium copper
Male Center Contact:	Gold plated brass
Heat Sink:	N/A
Dimensions:	Ø8×26.9 mm
RoHS Status:	RoHS Compliant



**Dimensions [mm]**

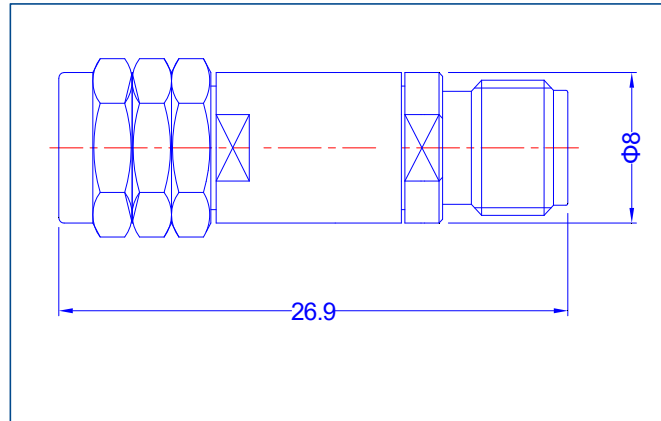

**Maximum Deviation over Frequency**

Nominal ATTN(dB)	Frequency Range(GHz)			
	DC-26.5	26.5-50	50-67	
1~9	-1.0/+1.5	-1.0/+1.5	-1.0/+1.5	-
10	-1.0/+1.5	-1.0/+1.5	-1.0/+1.5	-
20	-1.0/+2.0	-1.0/+2.0	-1.0/+2.0	-
VSWR(Max.)	1.35	1.4	1.45	-

**Ordering Information**

<b>TMFA</b>	<b>67</b>	<b>V</b>	<b>2</b>	<b>-</b>	<b>XX</b>
					XX: Attenuation dB value
					Average Power(W)
					RF Connector (V: 1.85mm-Male and 1.85mm-Female)
					X: Maximum Frequency(GHz) 67: DC~67 GHz
					Titan Microwave Fixed Attenuator