


PART NUMBER TMPD2RS-0006-2N	REV.	DATE	COMMENTS	INITIAL
	1	2020/4/25	ENGINEERING RELEASE	

Electrical Data


Frequency Range	DC~6GHz
Insertion Loss	7.5dB max
VSWR(input)	1.11 typ, 1.25 max
VSWR(output)	1.10 typ, 1.25 max
Isolation	5.6dB min
Amplitude Balance	± 0.3 dB
Phase Balance	± 3°
Impedance	50 Ohm
Input Average Power	2W max@25°C (derate linearly to 0.2W@100°C)

RoHS Compliant

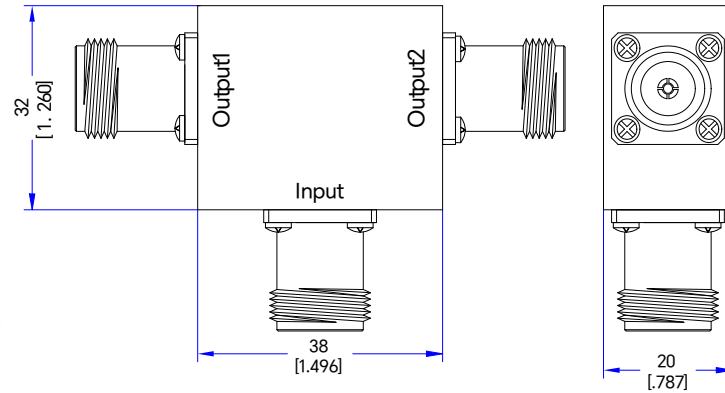

Mechanical Data

Connectors	N-Female
Connector Body	Ternary Alloy Plated Brass
Center Contact	Gold Plated Beryllium Copper
Dimensions	38 × 32 × 20mm
Surface Finish	Sandblasting Natural Color Conductive Oxidation
Material	Aluminum
Temperature Range	-35°C~+75°C



Drawing not to scale, units:mm



www.titan-microwave.com
 Tel: +86 130 866 58398
 Email: sales@titan-microwave.com
 chris@titan-microwave.com

PART NUMBER TMPD2RS-0006-2N		DESCRIPTION Resistive Power Divider, 2 Way, DC~6GHz 2W, N-Female
CAGE CODE	SIGNATURE	
EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.		