


PART NUMBER
TMELC-K

REV.	DATE	COMMENTS	INITIAL
1	2023/8/23	ENGINEERING RELEASE	

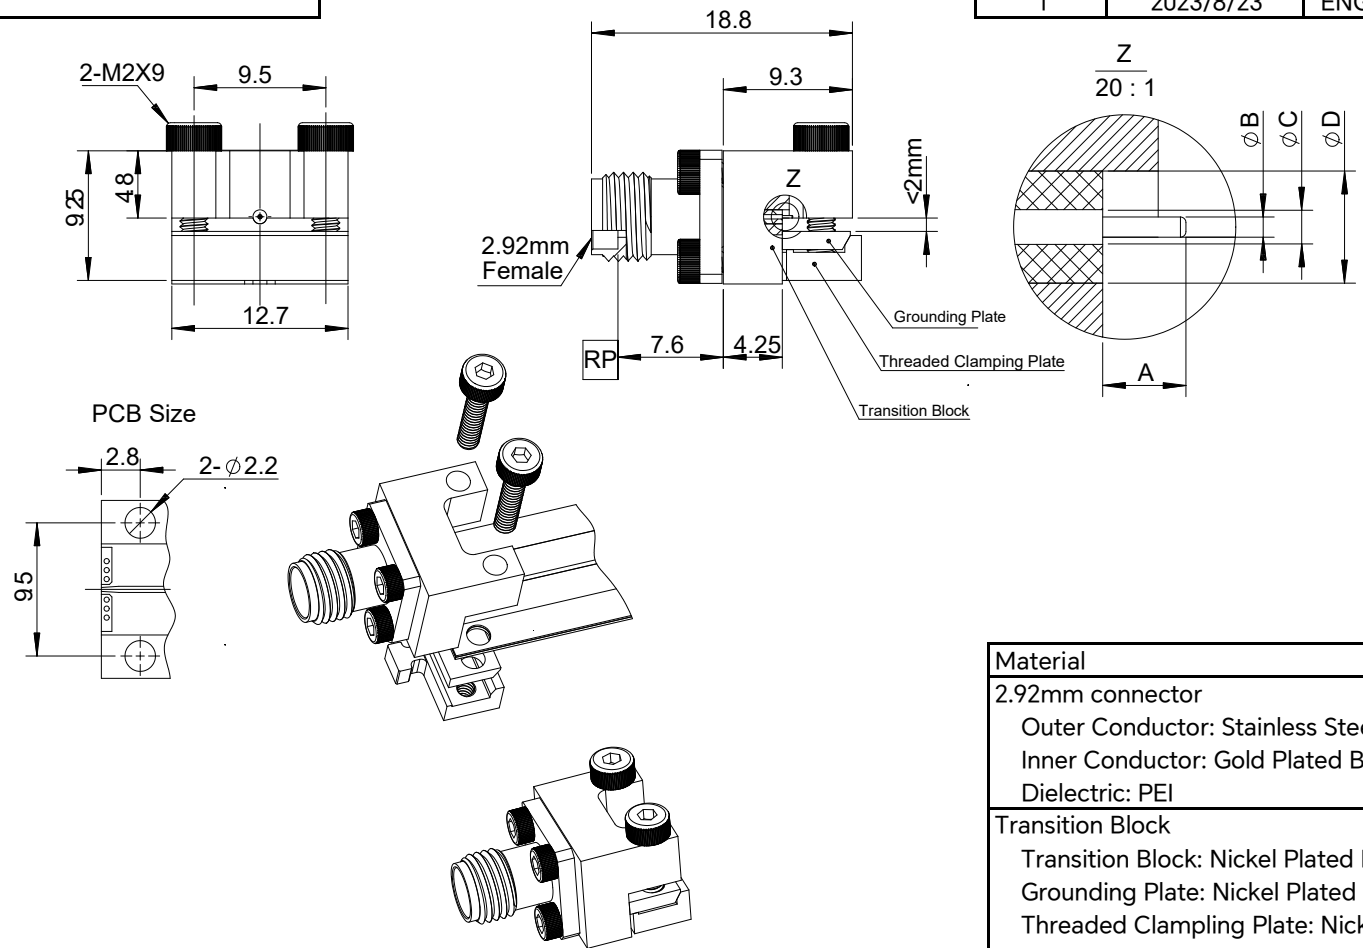

RoHS Compliant

Drawing not to scale, units:mm[inch]

DC~40GHz

Material
2.92mm connector Outer Conductor: Stainless Steel SUS303, Passivated Inner Conductor: Gold Plated Beryllium Copper Dielectric: PEI
Transition Block Transition Block: Nickel Plated Brass Grounding Plate: Nickel Plated Brass Threaded Clamping Plate: Nickel Plated Brass Pin: Gold Plated Beryllium Copper Dielectric: PEI

Ordering Information

Model Number	A		B		C		D	
	inch	mm	inch	mm	inch	mm	inch	mm
TMELC-K009	0.03	0.75	0.005	0.13	0.009	0.23	0.029	0.75
TMELC-K012	0.03	0.75	0.007	0.18	0.012	0.3	0.039	1.00
TMELC-K015	0.03	0.75	0.007	0.18	0.015	0.38	0.048	1.22
TMELC-K020	0.05	1.27	0.01	0.25	0.02	0.51	0.064	1.61

PART NUMBER
TMELC-K

DESCRIPTION
**End Launch Connector, DC-40GHz
2.92mm-Female**

CAGE CODE SIGNATURE



EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.

www.titan-microwave.com
Tel: +86 130 866 58398
Email: sales@titan-microwave.com
chris@titan-microwave.com