


PART NUMBER  
**TMPD10-00500300-20S**

REV.	DATE	COMMENTS	INITIAL
A	2020/4/25	ENGINEERING RELEASE	

**Specifications**

Frequency Range ..... 0.5-3GHz  
 Insertion Loss ..... 2.0dB max  
 (excluding theoretical insertion loss 10.2dB)  
 VSWR(input) ..... 1.8:1 max  
 VSWR(output) ..... 1.8:1 max  
 Isolation ..... 17dB min  
 Amplitude Balance ..... ±1.0dB max  
 Phase Balance ..... ±10° max  
 Impedance ..... 50 Ohms  
 Forward Power ..... 20W max  
 Reverse Power ..... 2W max  
 Connectors ..... SMA-Female  
 Operating Temperature ..... -40°C~+80°C  
 Storage Temperature ..... -45°C~+85°C  
 Dimensions ..... 133 × 113 × 10mm  
 Surface Finish ..... Black/Blue/Gray Painted  
 Material ..... Aluminum

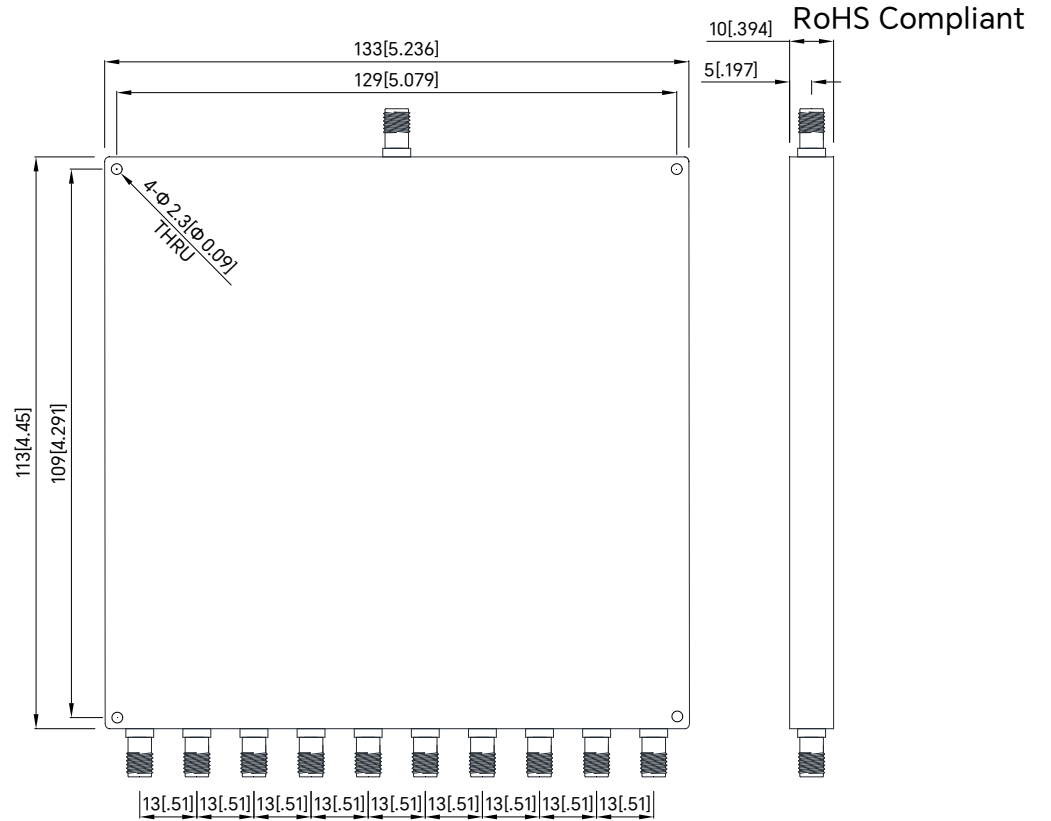

Drawing not to scale, units:mm[inch]



www.titan-microwave.com  
 Tel: +86 130 866 58398  
 Email: sales@titan-microwave.com  
 chris@titan-microwave.com

PART NUMBER		DESCRIPTION
<b>TMPD10-00500300-20S</b>		<b>Power Divider, 10 Way, 0.5-3GHz 20W, SMA-Female</b>
CAGE CODE	SIGNATURE	
	_____	
EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.		