


PART NUMBER TMPD4-04002200-10S	REV.	DATE	COMMENTS	INITIAL
	1	2021/3/15	ENGINEERING RELEASE	

Specifications

Frequency Range	4-22GHz
Insertion Loss (excluding theoretical loss 6.0 dB)	2.5dB Max
VSWR(input)	1.80:1 Max
VSWR(output)	1.60:1 Max
Isolation	16dB Min
Amplitude Balance	±0.8dB Max
Phase Balance	±8° Max
Impedance	50 Ohms
Forward Power	10W Max
Reverse Power	1W Max
Operating Temperature	-55°C~+85°C
Connectors	SMA-Female
Connector Body	Stainless Steel, Passivated
Connector Pin	Beryllium Copper, Gold Plated
Weight	60g

RoHS Compliant

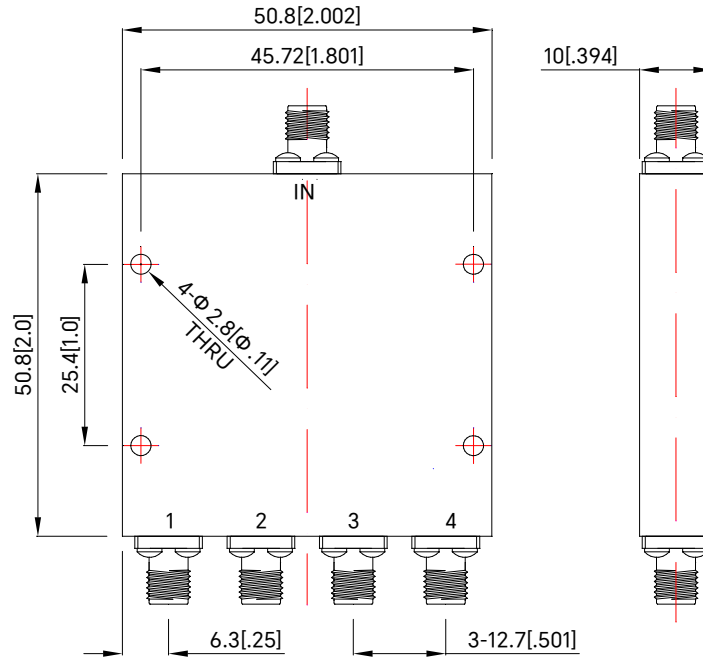

Drawing not to scale, units:mm



www.titan-microwave.com
 Tel: +86 130 866 58398
 Email: sales@titan-microwave.com
 chris@titan-microwave.com

PART NUMBER TMPD4-04002200-10S		DESCRIPTION Power Divider, 4 Way, 4-22GHz, 10W SMA-Female
CAGE CODE	SIGNATURE	
EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.		