


<b>PART NUMBER</b>
<b>TMPD46-08001200-2S</b>

<b>REV.</b>	<b>DATE</b>	<b>COMMENTS</b>	<b>INITIAL</b>
A	2020/4/25	ENGINEERING RELEASE	

**Specifications**

- Frequency Range ..... 8-12GHz
- Insertion Loss ..... 3.0dB max
- VSWR(input) ..... 1.6:1 max
- VSWR(output) ..... 1.5:1 max
- Isolation ..... 18dB min
- Amplitude Balance ..... ± 0.4dB max
- Phase Balance ..... ± 5° max
- Impedance ..... 50 Ohms
- Average Power ..... 2W(CW)
- Peak Power ..... 30W
- Connectors ..... SMA-Female
- Dimensions ..... 320 × 148 × 10mm
- Surface Finish ..... Gray Painted
- Operating Temperature ..... -55°C~+85°C

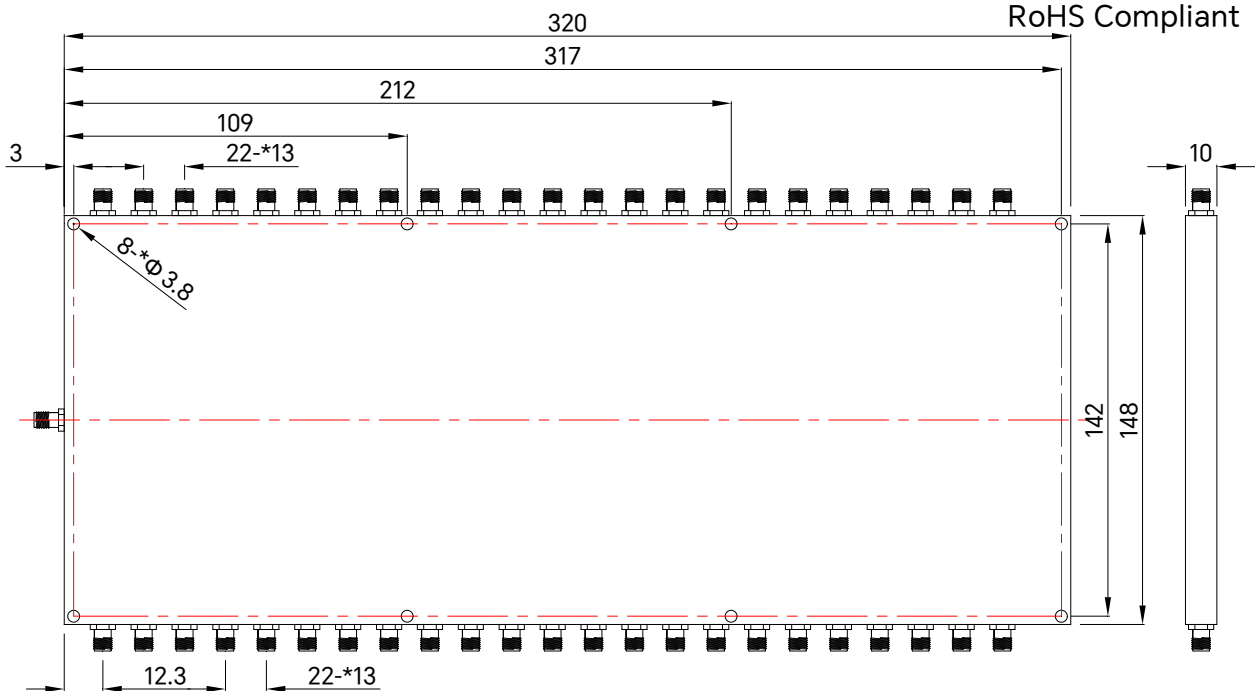

Drawing not to scale, units:mm



www.titan-microwave.com  
 Tel: +86 130 866 58398  
 Email: sales@titan-microwave.com  
 chris@titan-microwave.com

<b>PART NUMBER</b>		<b>DESCRIPTION</b>
<b>TMPD46-08001200-2S</b>		
<b>CAGE CODE</b>	<b>SIGNATURE</b>	
	_____	
<p>EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR          THIS DRAWING OR SPECIFICATION IS PROPERTY OF          TITAN MICROWAVE INC. IT IS ISSUED IN STRICT          CONFIDENCE AND SHALL NOT BE REPRODUCED OR          USED AS THE BASIS.</p>		