




PART NUMBER
TMPS3-00400800-2A

| REV. | DATE | COMMENTS | INITIAL |
|------|-----------|---------------------|---------|
| 1 | 2021/8/23 | ENGINEERING RELEASE | |

SPECIFICATIONS

Frequency Range 0.4-8GHz
 Insertion Loss 2.8dB max
 Isolation 80dB min
 Input&Output VSWR 1.5 max
 RF Input Power 2W(CW)
 Switching Speed 200ns max
 Connectors SMA-Female
 Power Supply Connectors JL4-4ZJW
 Voltage/Current +5Vdc@150mA max
 Operating Temperature -55°C~+85°C
 Storage Temperature -55°C~+85°C
 Dimensions 46 × 40 × 16mm
 Material Aluminum 6061
 Surface Finish Nickel Plated

RoHS Compliant

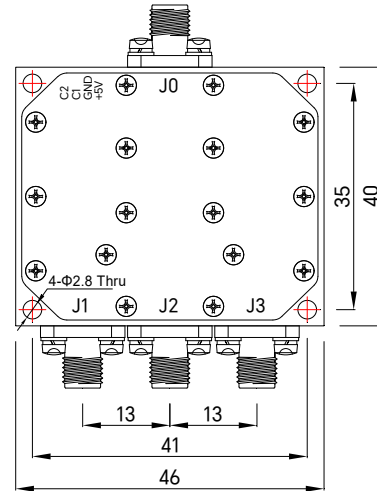

1=C2
2=C1
3=GND
4=+5V

Drawing not to scale, units:mm

Control Truth Table

| TTL Control Voltage Threshold | | Low(0)=0V |
|-------------------------------|----|-------------------|
| | | High(1)=3.3V-5V |
| C2 | C1 | Signal Path State |
| 0 | 0 | J0→J1 |
| 0 | 1 | J0→J2 |
| 1 | 0 | J0→J3 |
| 1 | 1 | OFF |

PART NUMBER
TMPS3-00400800-2A

CAGE CODE _____
SIGNATURE _____

EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.

DESCRIPTION
PIN Diode Switch, SP3T, 0.4-8GHz, Absorptive, 2W, SMA-Female



www.titan-microwave.com
Tel: +86 130 866 58398
Email: sales@titan-microwave.com
chris@titan-microwave.com