


PART NUMBER
TMPS8-00400600-2SA

REV.	DATE	COMMENTS	INITIAL
1	2020/8/8	ENGINEERING RELEASE	

SPECIFICATIONS

Frequency Range 0.4-6GHz
 Insertion Loss 3.5dB max
 Isolation 120dB min
 Input&Output VSWR 1.6 max
 RF Input Power 2W(CW)
 Switching Speed 200ns max
 Connectors SMA-Female
 Control Connector JL4-6ZJW
 Voltage/Current +5Vdc@350mA max
 Operating Temperature -55°C~+85°C
 Storage Temperature -55°C~+85°C
 Dimensions 110 × 90 × 18mm
 Material Aluminum 6061
 Surface Finish Nickel Plated

RoHS Compliant

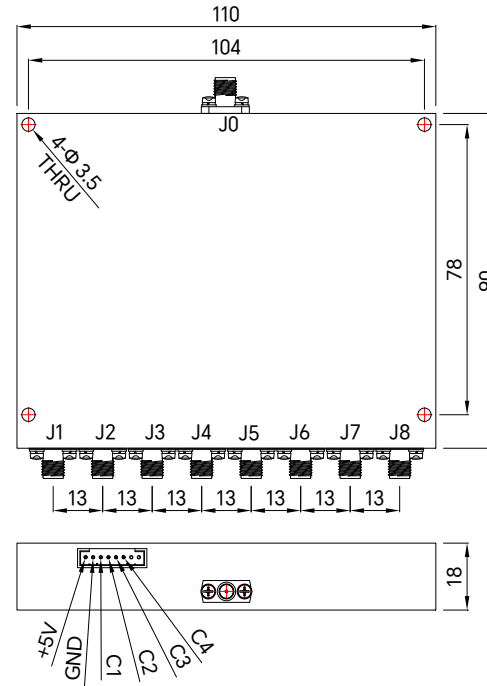

Drawing not to scale, units:mm

Control Truth Table

TTL Control Voltage Threshold				Low(0)=0V	Signal Path State
				High(1)=3.3V-5V	
C4	C3	C2	C1		
0	0	0	0		J0→J1
0	0	0	1		J0→J2
0	0	1	0		J0→J3
0	0	1	1		J0→J4
0	1	0	0		J0→J5
0	1	0	1		J0→J6
0	1	1	0		J0→J7
0	1	1	1		J0→J8
1	X	X	X		OFF

PART NUMBER TMPS8-00400600-2SA	
CAGE CODE	SIGNATURE
EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.	

DESCRIPTION
**PIN Diode Switch, SP8T, 0.4-6GHz,
Absorptive, 2W, SMA-Female**

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com
Tel: +86 130 866 58398
Email: sales@titan-microwave.com
chris@titan-microwave.com