


PART NUMBER
TMPS8-00401300-1S

REV.	DATE	COMMENTS	INITIAL
1	2020/8/8	ENGINEERING RELEASE	

SPECIFICATIONS

Frequency Range 0.4-13GHz
 Insertion Loss 5.0dB max
 Isolation 110dB typ
 Input&Output VSWR 1.6 typ
 RF Input Power 1W(CW)
 Switching Speed 300ns max
 Connectors SMA-Female
 Control Connector HX20007-WAP1 6PIN
 Voltage/Current +5Vdc@500mA max
 Operating Temperature -40°C~+70°C
 Storage Temperature -40°C~+70°C
 Dimensions 115 × 65 × 15mm
 Material Aluminum 6061
 Surface Finish Nickel Plated

RoHS Compliant

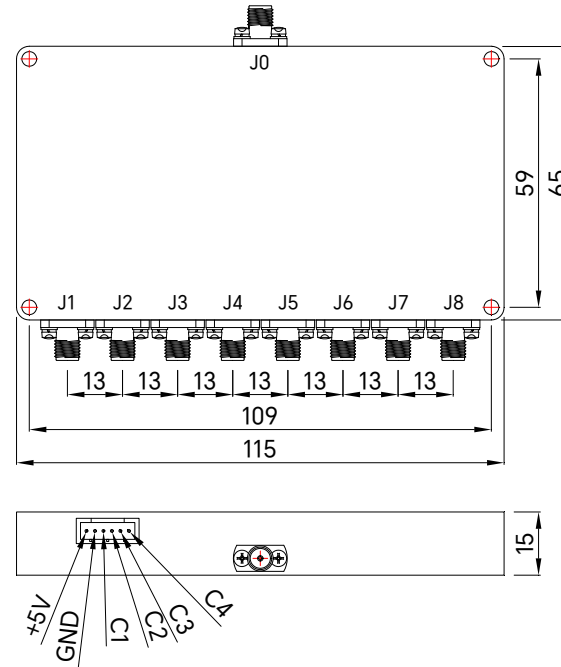

Drawing not to scale, units:mm

Control Truth Table

TTL Control Voltage Threshold				Low(0)=0V	Signal Path State
				High(1)=3.3V-5V	
C4	C3	C2	C1		
0	0	0	0		J0→J1
0	0	0	1		J0→J2
0	0	1	0		J0→J3
0	0	1	1		J0→J4
0	1	0	0		J0→J5
0	1	0	1		J0→J6
0	1	1	0		J0→J7
0	1	1	1		J0→J8
1	X	X	X		OFF

PART NUMBER TMPS8-00401300-1S	
CAGE CODE	SIGNATURE
EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.	

DESCRIPTION
**PIN Diode Switch, SP8T, 0.4-13GHz,
Absorptive, 1W, SMA-Female**

www.titan-microwave.com
 Tel: +86 130 866 58398
 Email: sales@titan-microwave.com
 chris@titan-microwave.com