


**PART NUMBER**  
**TMDC-00400600-30S30**

REV.	DATE	COMMENTS	INITIAL
1	2020/10/19	ENGINEERING RELEASE	

**SPECIFICATIONS**

Frequency Range ..... 400~6000MHz  
 Coupling ..... 30±1.5dB Max  
 Insertion Loss ..... 0.6dB Max  
 Coupling Accuracy ..... ±1.5dB Max  
 Directivity ..... 10dB Min  
 VSWR(Main) ..... 1.3:1 Max  
 VSWR(Secondary) ..... 1.3:1 Max  
 Average Power ..... 30W(CW)  
 Connectors ..... SMA-Female  
 Operating Temperature ..... -55°C~+85°C  
 Surface Finish ..... Gray Painted

**RoHS Compliant**

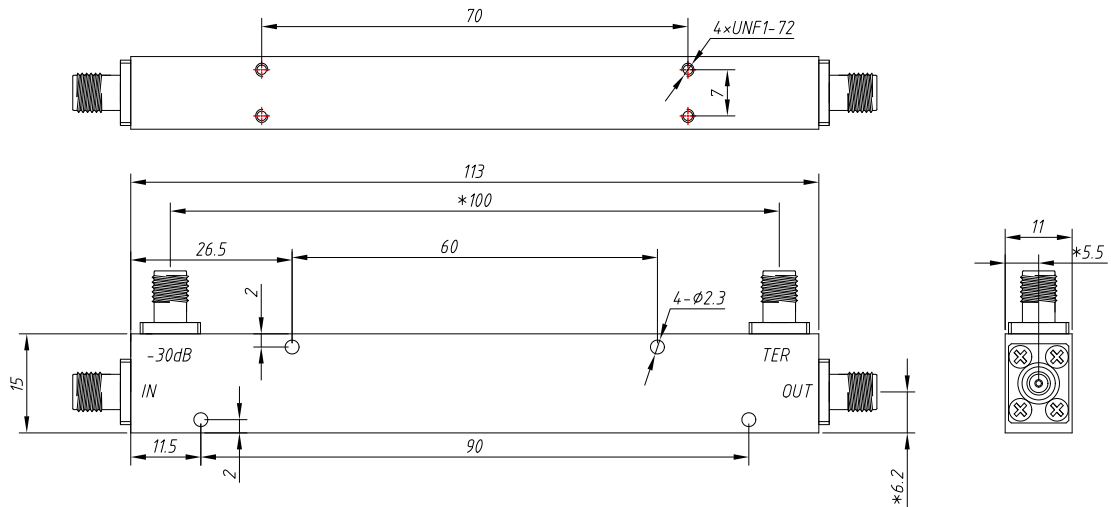

Drawing not to scale, units:mm



www.titan-microwave.com  
 Tel: +86 130 866 58398  
 Email: sales@titan-microwave.com  
 chris@titan-microwave.com

PART NUMBER <b>TMDC-00400600-30S30</b>		DESCRIPTION <b>Single Directional Coupler, 0.4-6GHz Coupling 30dB, 30W, SMA-Female</b>
CAGE CODE	SIGNATURE <i>Chris's Chen</i>	
EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.		