


PART NUMBER
TMDC-02004000-15K2

REV.	DATE	COMMENTS	INITIAL
A	2020/4/25	ENGINEERING RELEASE	


SPECIFICATIONS

Frequency Range 2~40GHz
 Coupling 15.5 ± 3dB max
 Return Loss 15dB min
 Insertion Loss 1.8dB max
 Directivity 15dB min
 Impedance 50 Ohms
 Power Rating 2W max
 Operating Temperature -20°C~+70°C
 Storage Temperature -55°C~+85°C
 RFIN Connector 2.92mm-Female
 RFOUT Connector 2.92mm-Female
 Coup Connector(RFOUT2) 2.92mm-Female

RoHS Compliant

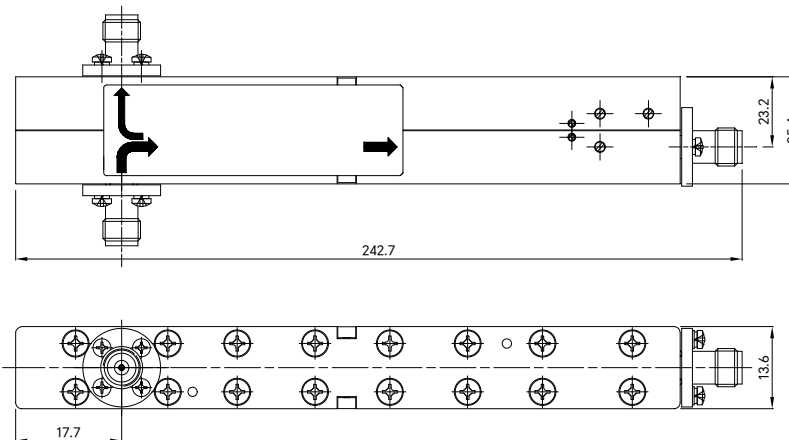

Schematic Diagram:

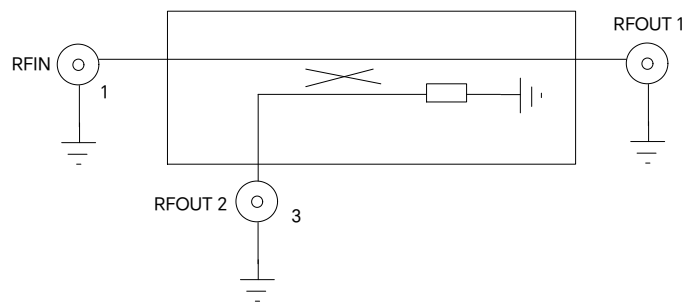

Drawing not to scale, units:mm



www.titan-microwave.com
 Tel: +86 130 866 58398
 Email: sales@titan-microwave.com
 chris@titan-microwave.com

PART NUMBER TMDC-02004000-15K2		DESCRIPTION Directional Coupler, 2~40GHz, Coupling 15.5dB 2W, 2.92mm-Female
CAGE CODE	SIGNATURE _____	
EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.		