PART NUMBER
TBF-10561096-60S

REV.	DATE	COMMENTS	INITIAL
1	2020/1/25	ENGINEERING RELEASE	

Specifications

RoHS Compliant

Passband Frequency Range	10560-10960MHz
Center Frequency(F_0)	10760MHz
Passband Insertion Loss	2.5dB max
Passband Ripple	1.1dB max
Passband Return Loss	23dB min
Stopband Rejection	60dB min@DC-10.44GHz
	60dB min@11.08-24.0GHz
Power Handling	10W max
Impedance	50 Ohms
Operating Temperature	-30℃~+70℃
Connectors	SMA-Female
Connectors Body	Stainless Steel
Housing Material	H62 Copper Alloy
Finish	Black Painted
Weight	104g

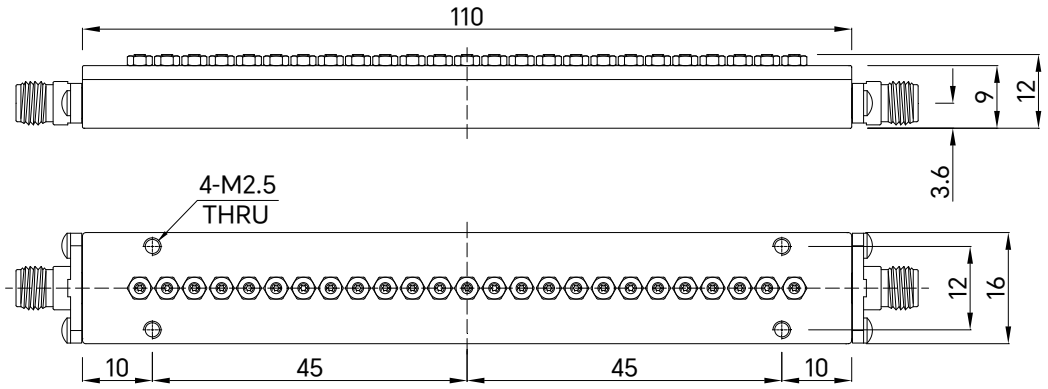

Drawing not to scale, units:mm

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com
Tel: +86 130 866 58398
Email: sales@titan-microwave.com
chris@titan-microwave.com

PART NUMBER	DESCRIPTION
TBF-10561096-60S	Cavity Band Pass Filter, Passband 10.56-10.96GHz Stopband Rejection 60dB, 10W, SMA-Female
CAGE CODE / SIGNATURE	

EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.