PART NUMBER	REV.	DATE	COMMENTS	INITIAL
TBF-1500M20-40S	1	2020/1/2	ENGINEERING RELEASE	

Specifications

RoHS Compliant

Passband Frequency Range	1475-1525MHz
Center Frequency(F_0)	1500MHz
Passband Insertion Loss	1.0dB max
Passband Ripple	0.5dB max
Passband Return Loss	20dB min
Stopband Rejection	40dB min@DC-1455MHz
	40dB min@1545-4500MHz
Power Handling	20W max
Impedance	50 Ohms
Operating Temperature	-30℃~+70℃
Connectors	SMA-Female(Stainless Steel)
Housing Material	6061 Aluminum Alloy
Finish	Black Painted
Weight	340g

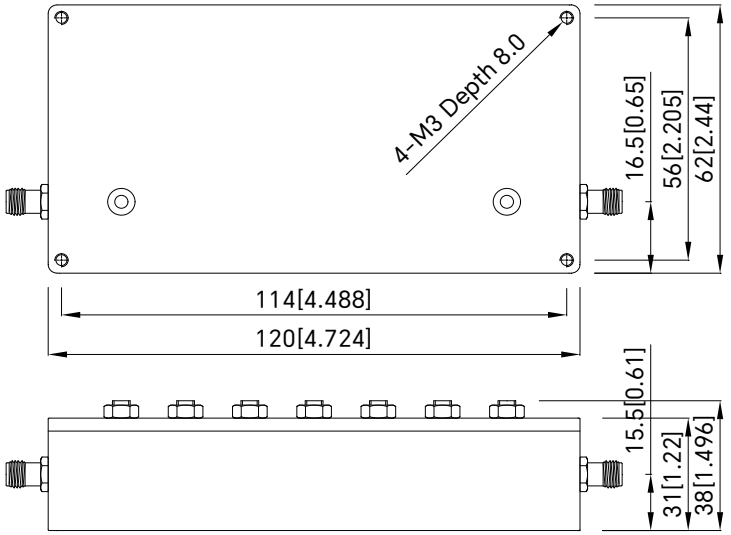

Drawing not to scale, units:mm[inch]

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com
Tel: +86 130 866 58398
Email: sales@titan-microwave.com
chris@titan-microwave.com

PART NUMBER	DESCRIPTION
TBF-1500M20-40S	Cavity Band Pass Filter, 1475~1525MHz Stopband Rejection 40dB, 20W, SMA-Female
CAGE CODE / SIGNATURE	

EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.