PART NUMBER
TBF-02200250-30S

REV.	DATE	COMMENTS	INITIAL
1	2020/1/2	ENGINEERING RELEASE	

Specifications

RoHS Compliant

Passband Frequency Range 2200-2507MHz
Center Frequency(F_0) 2353.5MHz
Passband Insertion Loss ..... 0.7dB max
Passband Ripple ..... 0.3dB max
Passband Return Loss ..... 23dB min
Stopband Rejection ..... 30dB min@DC-2090MHz
..... 35dB min@2617-9500MHz
Power Handling ..... 10W max
Impedance ..... 50 Ohms
Operating Temperature ..... -30℃~+70℃
Connectors ..... SMA-Female(Removable)
Housing Material ..... 6061 Aluminum Alloy
Finish ..... Silver Color
Weight 95g

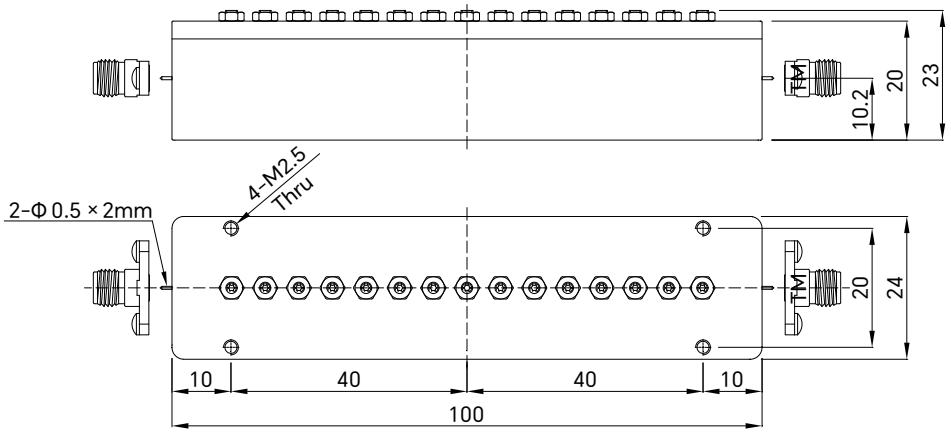

Drawing not to scale, units:mm[inch]

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com
Tel: +86 130 866 58398
Email: sales@titan-microwave.com
chris@titan-microwave.com

PART NUMBER		DESCRIPTION
TBF-02200250-30S		Cavity Band Pass Filter, Passband 2200-2507MHz Stopband Rejection 30dB, 10W, SMA-Female
CAGE CODE	SIGNATURE	

EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.