PART NUMBER	REV.	DATE	COMMENTS	INITIAL
TBF-2236M20-70S	1	2020/1/25	ENGINEERING RELEASE	

Specifications

RoHS Compliant

Passband Frequency Range 2216-2256MHz
Center Frequency(F_0) 2236MHz
Passband Insertion Loss ..... 1.0dB max
Passband Ripple ..... 0.4dB max
Passband Return Loss ..... 20dB min
Stopband Rejection ..... 70dB min@DC-2176MHz
..... 70dB min@2296-6500MHz
Power Handling ..... 20W max
Impedance ..... 50 Ohms
Operating Temperature ..... -30℃~+70℃
Connectors ..... SMA-Female
Connectors Body ..... Stainless Steel
Housing Material ..... Aluminum 6061
Finish ..... Silver Color

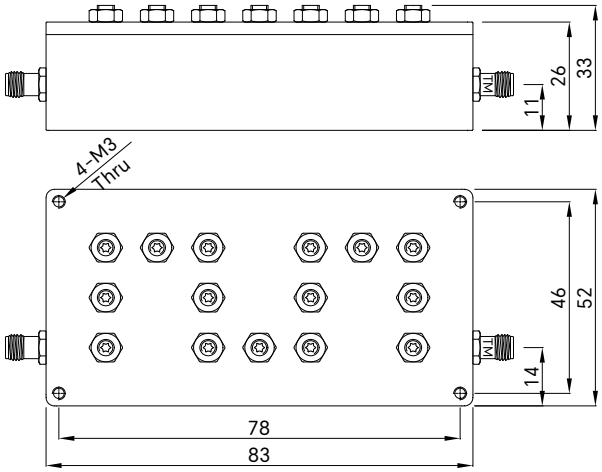

Drawing not to scale, units:mm

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -
www.titan-microwave.com
Tel: +86 130 866 58398
Email: sales@titan-microwave.com
chris@titan-microwave.com

PART NUMBER		DESCRIPTION
TBF-2236M20-70S		Cavity Band Pass Filter, 2216-2256MHz Stopband Rejection 70dB, 20W, SMA-Female
CAGE CODE	SIGNATURE	

EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.