PART NUMBER	REV.	DATE	COMMENTS	INITIAL
TBF-11001200-80S	1	2020/1/2	ENGINEERING RELEASE	

Specifications

RoHS Compliant

Passband Frequency Range 11006-12006MHz
Center Frequency(F_0) 11506MHz
Passband Insertion Loss ..... 1.0dB max
Passband Ripple ..... 0.3dB max
Passband VSWR ..... 1.15:1 max
Passband Group Delay ..... 4.5ns max
Stopband Rejection ..... 80dB min@DC-10450MHz
..... 75dB min@12550-26500MHz
Power Handling ..... 5W max
Impedance ..... 50 Ohms
Operating Temperature ..... -40℃~+70℃
Connectors ..... SMA-Female(Stainless Steel)
Housing Material ..... H62 Copper Alloy
Finish ..... Black Painted
Weight 95g

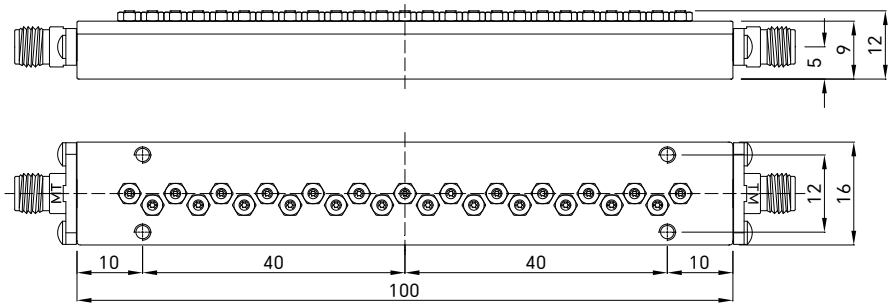

Drawing not to scale, units:mm

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com
Tel: +86 130 866 58398
Email: sales@titan-microwave.com
chris@titan-microwave.com

PART NUMBER		DESCRIPTION
TBF-11001200-80S		Cavity Band Pass Filter, Passband 11006-12006MHz Stopband Rejection 80dB, 5W, SMA-Female
CAGE CODE	SIGNATURE	

EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.