| PART NUMBER |
|---|
| TBF-620M632M-30S |

| REV. | DATE | COMMENTS | INITIAL |
|---|---|---|---|
| 1 | 2020/7/25 | ENGINEERING RELEASE | |

## Specifications

RoHS Compliant

Passband Frequency Range ..... 620-632MHz
Center Frequency($F_0$) ..... 626MHz
Passband Insertion Loss ..... 1.5dB max
Passband Ripple ..... 0.6dB max
Passband Return Loss ..... 20dB min
Stopband Rejection ..... 30dB min@DC-614MHz
..... 30dB min@638-3000MHz
Power Handling ..... 20W max
Impedance ..... 50 Ohms
Operating Temperature ..... -30℃~+70℃
Connectors ..... SMA-Female
Connectors Body ..... Stainless Steel
Housing Material ..... Aluminum 6061
Finish ..... Black Painted
Weight ..... 670g

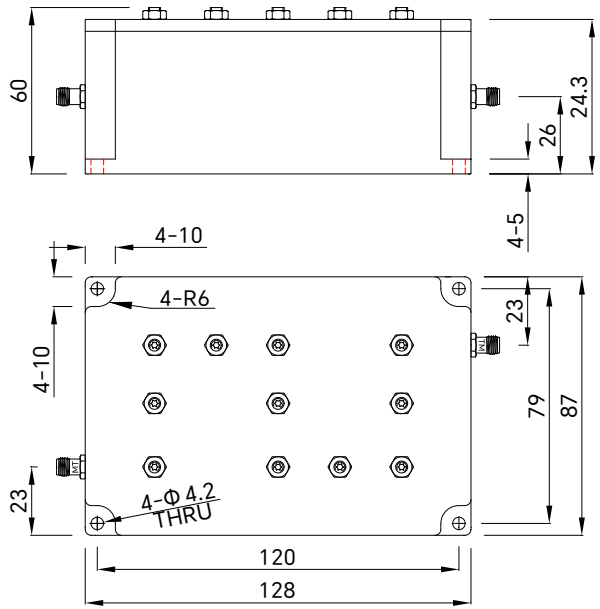


Drawing not to scale, units:mm


成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com
Tel: +86 130 866 58398
Email: sales@titan-microwave.com
chris@titan-microwave.com


| PART NUMBER | | DESCRIPTION |
|---|---|---|
| TBF-620M632M-30S | | Cavity Band Pass Filter, Passband 9.28-9.68GHz Stopband Rejection 60dB, 10W, SMA-Female |
| CAGE CODE | SIGNATURE | |


EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.