| PART NUMBER |
|---|
| TBF-02900350-60SA |

| REV. | DATE | COMMENTS | INITIAL |
|---|---|---|---|
| 1 | 2020/7/19 | ENGINEERING RELEASE | |

## Specifications

**RoHS Compliant**

Passband Frequency Range ..... 2900-3500MHz
Center Frequency($F_0$) ..... 3200MHz
3.0dB Bandwidth ..... 2860-3540MHz max
Passband Insertion Loss ..... 1.0dB max@2900-3500MHz
Passband Ripple ..... 0.5dB max@2900-3500MHz
Passband VSWR ..... 1.3:1 max@2900-3500MHz
Stopband Rejection ..... 60dB min@DC-2400MHz
..... 60dB min@4000-11000MHz
Power Handling ..... 5W max
Impedance ..... 50 Ohms
Operating Temperature ..... -30℃~+70℃
Connectors ..... SMA-Female
Housing Material ..... H62 Copper Alloy
Finish ..... Black Painted
Weight ..... 255g

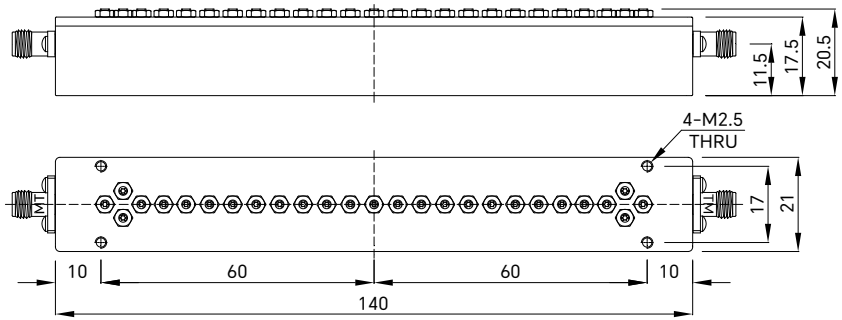


Drawing not to scale, units:mm


成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com
Tel: +86 130 866 58398
Email: sales@titan-microwave.com
chris@titan-microwave.com


| PART NUMBER | | DESCRIPTION |
|---|---|---|
| TBF-02900350-60SA | | Comb Band Pass Filter, 2900~3500MHz<br>Stopband Rejection 60dB, 5W, SMA-Female |
| CAGE CODE | SIGNATURE | |


EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.