


PART NUMBER
TMDC-02300520-20N50

REV.	DATE	COMMENTS	INITIAL
1	2021/7/11	ENGINEERING RELEASE	

Specifications

RoHS Compliant

- Frequency Range 2.3-5.2GHz
- Insertion Loss 0.6dB max (Excluding Coupling Loss 0.04dB)
- Nominal Coupling 20 ± 1.0dB max
- Coupling Sensitivity ± 1.0dB max
- Directivity 15dB min
- VSWR Primary 1.3:1 max
- VSWR Secondary 1.3:1 max
- Impedance 50 Ohms
- Power Handling 50W (Incident), 50W (Reflected)
- Connectors N-Female
- Center Contact Gold Plated Beryllium Copper
- Dimensions 116 × 28 × 23mm
- Surface Finish Black/Blue Painted
- Material Aluminum 6061
- Temperature Range -45°C~+85°C
- Weight 260g

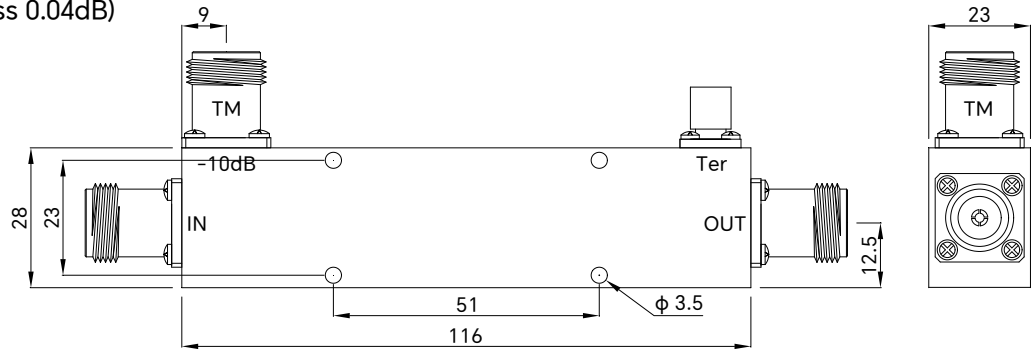

Drawing not to scale, units:mm



www.titan-microwave.com
Tel: +86 130 866 58398
Email: sales@titan-microwave.com
chris@titan-microwave.com

PART NUMBER TMDC-02300520-20N50		DESCRIPTION Directional Coupler, 2.3~5.2GHz, 20 ± 1dB, 50W N-Female
CAGE CODE	SIGNATURE	
EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.		