


TMPD2-00402650-20S

**0.4 to 26.5 GHz, 20W, SMA-Female
 2-WAY POWER DIVIDER**

Electrical Characteristics

Frequency Range 0.4~26.5GHz
Insertion Loss 1.9dB max
 (excluding theoretical insertion loss 3.0dB)
Amplitude Balance ±0.3dB max
Phase Balance ±4° max
VSWR(input port) 1.5:1 max
VSWR(output ports) 1.5:1 max
Isolation 16dB min@0.4-1GHz
Isolation 20dB min@1-26.5GHz
Impedance 50 Ohms
Power Handling 20W

Outline Drawing(mm[inch])

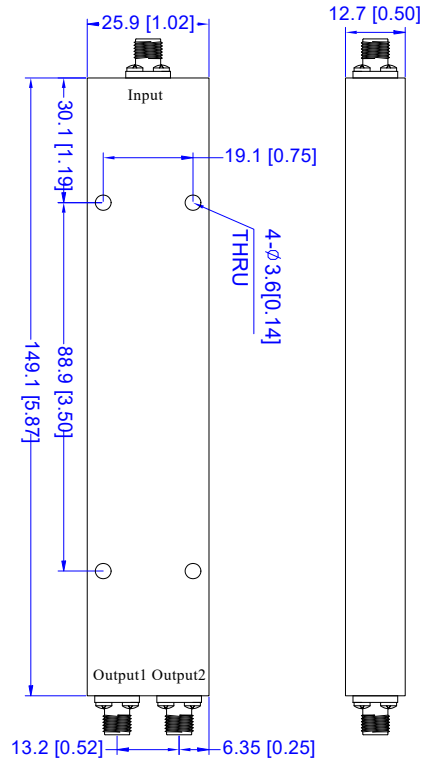

Mechanical & Environmental Characteristics

Dimensions 149.1 × 25.9 × 12.7mm
RF Connectors SMA-Female
Surface Finishing Black/Blue/Gray Paint
Operating Temperature -40°C~+85°C
Storage Temperature -50°C~+105°C