


TMPD4-02004000-20KC

**2 to 40 GHz, 20W, 2.92mm-Female
4-WAY POWER DIVIDER**

Electrical Characteristics

- Frequency Range** 2~40GHz
- Insertion Loss** 4.5dB max
(excluding theoretical insertion loss 6.0dB)
- Amplitude Balance** ± 0.5 dB max
- Phase Balance** $\pm 7^\circ$ max
- VSWR(input port)** 1.7:1 typ
- VSWR(output ports)** 1.7:1 max
- Isolation** 18dB min
- Impedance** 50 Ohms
- Power Handling** 20W

Outline Drawing(mm[inch])

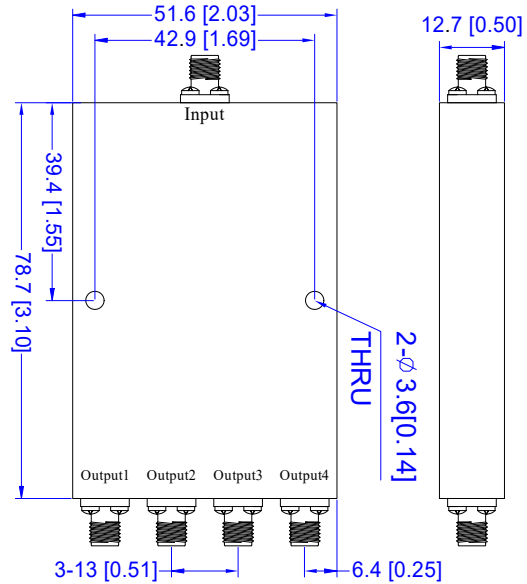

Mechanical & Environmental Characteristics

- Dimensions** 51.6 × 78.7 × 12.7mm
- RF Connectors** 2.92mm-Female
- Surface Finishing** Black/Blue/Gray Paint
- Operating Temperature** -40°C~+85°C
- Storage Temperature** -50°C~+105°C