


**TMPD4-04004400-10K**

**4 to 44 GHz, 10W, 2.92mm-Female  
4-WAY POWER DIVIDER**

**Electrical Characteristics**

**Frequency Range** ..... 4~44GHz  
**Insertion Loss** ..... 2.4dB max  
 (excluding theoretical insertion loss 6.0dB)  
**Amplitude Balance** .....  $\pm 0.6$ dB max  
**Phase Balance** .....  $\pm 6^\circ$  max  
**VSWR(input port)** ..... 1.8:1 max  
**VSWR(output ports)** ..... 1.6:1 max  
**Isolation** ..... 15dB min  
**Impedance** ..... 50 Ohms  
**Power Handling** ..... 10W

**Outline Drawing(mm[inch])**

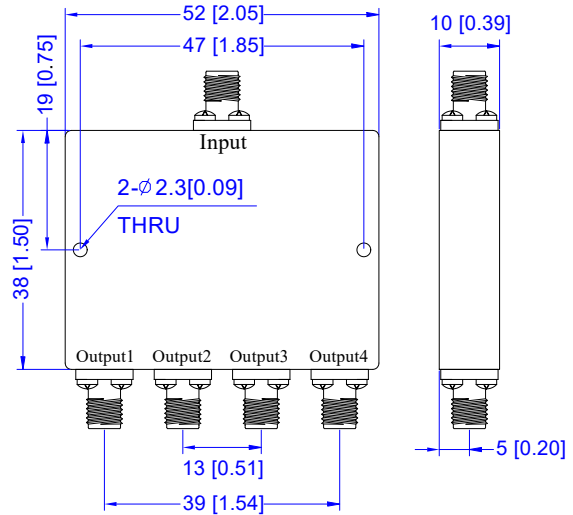

**Mechanical & Environmental Characteristics**

**Dimensions** ..... 52 × 38 × 10mm  
**RF Connectors** ..... 2.92mm-Female  
**Material** ..... Aluminum  
**Surface Finishing** ..... Black/Blue/Gray Paint  
**Operating Temperature** ..... -40°C~+85°C  
**Storage Temperature** ..... -50°C~+105°C