


TMPD4-06001800-20N

**6 to 18 GHz, 20W, N-Female
4-WAY POWER DIVIDER**

Electrical Characteristics

Frequency Range 6~18GHz
Insertion Loss 1.8dB max.
 (excluding theoretical insertion loss 6.0dB)
Amplitude Balance ± 0.4 dB max
Phase Balance $\pm 6^\circ$ max
VSWR(input port) 1.6:1 max
VSWR(output ports) 1.5:1 max
Isolation 18dB min
Impedance 50 Ohms
Power Handling 20W

Outline Drawing(mm[inch])

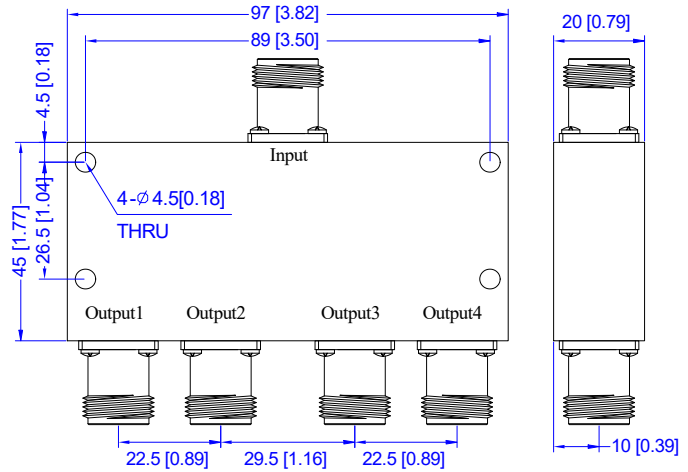

Mechanical & Environmental Characteristics

Dimensions 97 × 45 × 20mm
RF Connectors N-Female
Surface Finishing Black/Blue/Gray Paint
Operating Temperature -40°C~+85°C
Storage Temperature -50°C~+105°C