


TMPD2-10002650-20SC

**10 to 26.5 GHz, 20W, SMA-Female
2-WAY POWER DIVIDER**

Electrical Characteristics

Frequency Range 10~26.5GHz
Insertion Loss 1.2dB max
 (excluding theoretical insertion loss 3.0dB)
Amplitude Balance ± 0.3 dB max
Phase Balance $\pm 4^\circ$ max
VSWR(input port) 1.5:1 max
VSWR(output ports) 1.5:1 max
Isolation 20dB min
Impedance 50 Ohms
Power Handling 20W

Outline Drawing(mm[inch])

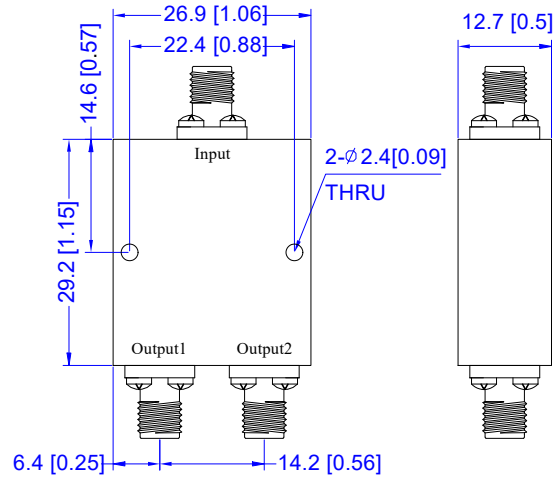

Mechanical & Environmental Characteristics

Dimensions 26.9 × 29.2 × 12.7mm
RF Connectors SMA-Female
Material Aluminum
Surface Finishing Black/Blue/Gray Paint
Operating Temperature -40°C~+85°C
Storage Temperature -50°C~+105°C