


TMPD3-18002650-20S

**18 to 26.5 GHz, 20W, SMA-Female
3-WAY POWER DIVIDER**

Electrical Characteristics

Frequency Range 18~26.5GHz
Insertion Loss 1.4dB max
 (excluding theoretical insertion loss 4.8dB)
Amplitude Balance ± 0.5 dB max
Phase Balance $\pm 5^\circ$ max
VSWR(input port) 1.6:1 max
VSWR(output ports) 1.5:1 max
Isolation 20dB min
Impedance 50 Ohms
Power Handling 20W

Outline Drawing(mm[inch])

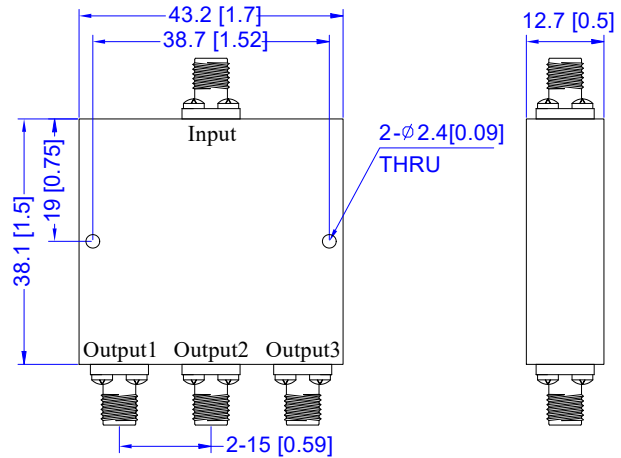

Mechanical & Environmental Characteristics

Dimensions 43.2 × 38.1 × 12.7mm
RF Connectors SMA-Female
Material Aluminum
Surface Finishing Black/Blue/Gray Paint
Operating Temperature -40°C~+85°C
Storage Temperature -50°C~+105°C