


TMPD2-00400300-30S

**0.4 to 3 GHz, 30W, SMA-Female
2-WAY POWER DIVIDER**

Electrical Characteristics

- Frequency Range** 0.4~3GHz
- Insertion Loss** 0.5dB typ, 0.6dB max
(excluding theoretical insertion loss 3.0dB)
- Amplitude Balance** ± 0.3 dB max
- Phase Balance** $\pm 3^\circ$ max
- VSWR(input port)** 1.3:1 max
- VSWR(output ports)** 1.25:1 max
- Isolation** 20dB min, 22dB typ
- Impedance** 50 Ohms
- Power Handling** 30W max

Outline Drawing(mm[inch])

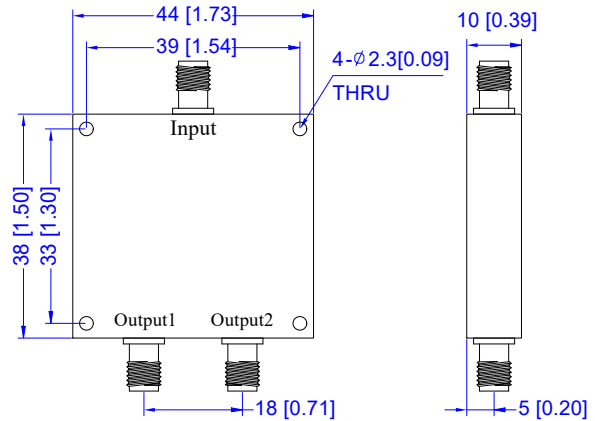

Mechanical & Environmental Characteristics

- Dimensions** 44 × 38 × 10mm
- RF Connectors** SMA-Female
- Material** Aluminum
- Surface Finishing** Black/Blue/Gray Paint
- Operating Temperature** -40°C~+85°C
- Storage Temperature** -50°C~+105°C