


TMPD12-00800200-30S

**0.8 to 2 GHz, 30W, SMA-Female
12-WAY POWER DIVIDER**

Electrical Characteristics

- Frequency Range** 0.8~2GHz
- Insertion Loss** 0.6dB max
(excluding theoretical insertion loss 10.8dB)
- Amplitude Balance** ± 0.4 dB max
- Phase Balance** $\pm 6^\circ$ max
- VSWR(input port)** 1.5:1 max
- VSWR(output ports)** 1.28:1 max
- Isolation** 18dB min
- Impedance** 50 Ohms
- Power Handling** 30W

Outline Drawing(mm[inch])

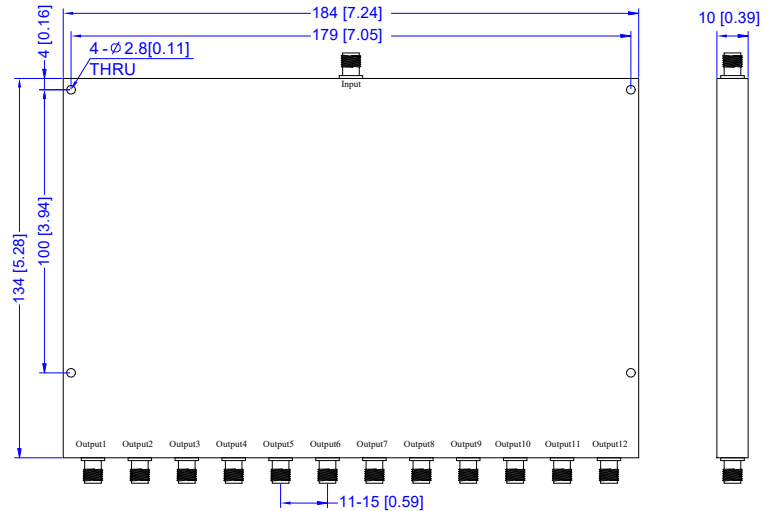

Mechanical & Environmental Characteristics

- Dimensions** 184 × 134 × 10mm
- RF Connectors** SMA-Female
- Surface Finishing** Black/Blue/Gray Paint
- Operating Temperature** -40°C~+85°C
- Storage Temperature** -50°C~+105°C