


## Product Features


- Power handling up to 15W
- Wide band operation
- Functional Bandwidth : 2GHz to 8GHz
- High isolation within operational band
- Low Insertion Loss
- Stable performance over temperature
- High peak to average handling capability



## Specifications

Frequency Range	2000~8000MHz
Nominal Split	3.0dB
Insertion Loss	1.0dB max
Isolation	17dB min
Amplitude Balance	±0.5dB max
Phase Balance	±10 Deg. max
VSWR	1.5 max.
Power Handling	15W(CW), 2kW(PK)
Impedance	50 Ohms
RF Connectors	SMA-Female
Surface Finishing	Conductive Oxidation, Silver Colour
Operating Temp.	-20°C~+60°C
Dimensions	47×32×11mm

## Outline Drawing(mm)

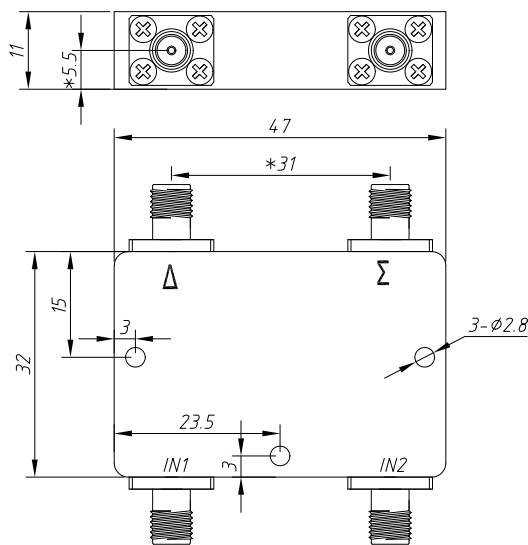

Outline Tolerances ±0.2mm