



<b>PART NUMBER</b> <b>WGC430-6060-D20N</b>
---

REV.	DATE	COMMENTS	INITIAL
1	2021/7/30	ENGINEERING RELEASE	

### SPECIFICATIONS

Frequency Range .....	2.4-2.5GHz
Coupling .....	60±1.0dB
Directivity .....	20dB min
VSWR Primary .....	1.1:1 max
VSWR Secondary .....	1.25:1 max
Impedance .....	50 Ohms
Waveguide Type .....	WR-430
Flange Type .....	FDP22(UDR) Flange
Coupled Port .....	N-Female
Waveguide Body .....	Aluminum, Grey Painted
Dimensions .....	170(L)×161.1(W)×35(H)mm

RoHS Compliant

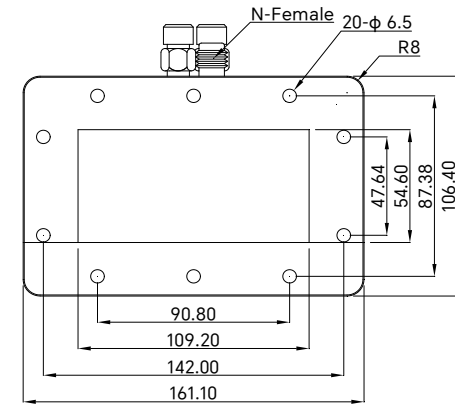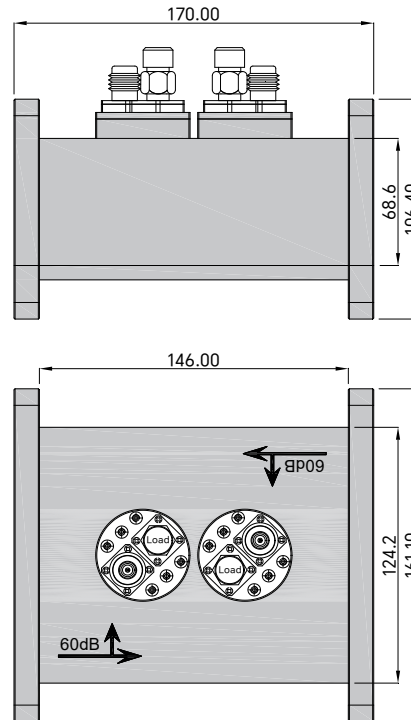

Drawing not to scale, units:mm



www.titan-microwave.com  
 Tel: +86 185 8328 2993  
 Email: sales@titan-microwave.com  
 chris@titan-microwave.com

<b>PART NUMBER</b> <b>WGC430-6060-D20N</b>		<b>DESCRIPTION</b> Waveguide Dual Directional Loop Coupler WR-430, 2.4~2.5GHz, 60 ± 1.0dB, N-Female
<b>CAGE CODE</b>	<b>SIGNATURE</b> _____	
EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.		