


Specifications


Frequency Range:	DC~18GHz
Input Avg Power:	20W@25°C
Impedance:	50 Ohms
Attenuation:	1-30dB
VSWR:	1.30 max.
Connector:	SMA-Male and SMA-Female
Operating Temp.:	-55°C~+125°C
Connector Body:	Gold plated brass / Stainless steel
Female Center Contact:	Gold plated beryllium copper
Male Center Contact:	Gold plated brass
Heat Sink:	Black anodized aluminum
Dimensions:	Ø36 × 77.2mm
Net Weight:	120g
RoHS Status:	RoHS Compliant

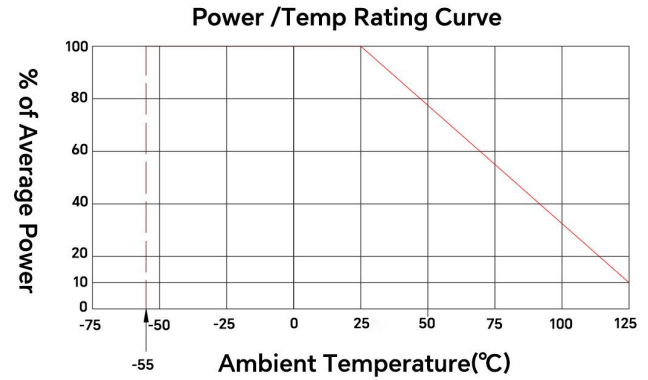

Maximum Deviation over Frequency

Nominal ATTN(dB)	Frequency Range(GHz)			
	-	-	DC~12.4	DC~18
1~10	-	-	± 0.6	± 0.6
11~20	-	-	± 0.8	± 0.8
21~30	-	-	± 1.0	± 1.0
VSWR(max)	-	-	1.3	1.3

Dimensions [mm]

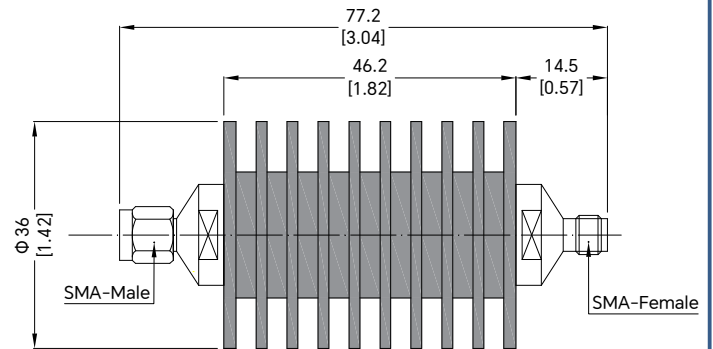

Ordering Information

