


TMPS2-00200050-200

**0.2 to 0.5GHz, 200W
Reflective, SPDT, Pin Diode Switch**

Electrical Characteristics

Outline Drawing(mm)

- Frequency Range 200~500MHz
- Insertion Loss 0.3dB max
- VSWR 1.2 max
- Isolation 40dB min
- Positive Operating Voltage ... +5V/200mA
- Negative Operating Voltage .. -90V/-20mA
- Power Handling 200W (CW) max
- Control TTL
- Dimensions 70 × 35 × 9mm

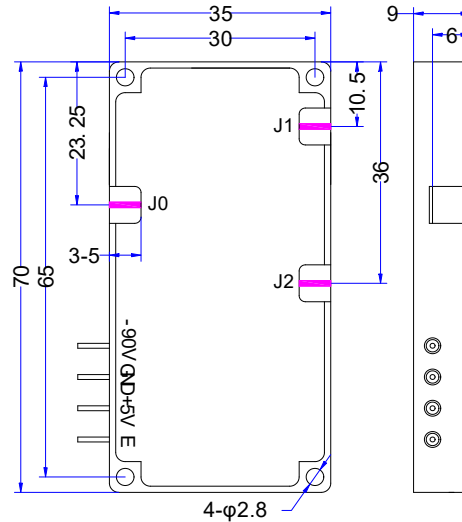

Control Truth Table

E	J0-J1	J0-J2
1	OFF	ON
0	ON	OFF