


TMPS2-00900120-1000 **0.9 to 1.2GHz, Pulse Power 1000W**
Reflective, SPDT, Pin Diode Switch

Electrical Characteristics

- Frequency Range 900~1200MHz
- Insertion Loss 0.5dB max
- VSWR 1.3 max
- Isolation 50dB min
- Switching Time 20ms max
- Positive Operating Voltage ... +5V/200mA
- Negative Operating Voltage.. -60V/-10mA
- Pulse Power 1000W(Duty Cycle 4%)
- Control TTL
- RF Connectors SMA-Female
- Dimensions 50 × 35 × 12mm

Outline Drawing(mm)

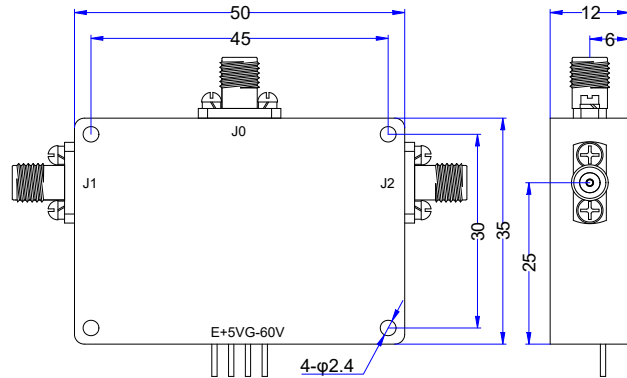

Control Truth Table

E	J0-J1	J0-J2
1	OFF	ON
0	ON	OFF