


TMPD4-26504000-10K

**26.5 to 40 GHz, 10W, 2.92mm-Female
4-WAY POWER DIVIDER**

Electrical Characteristics

Frequency Range	26.5~40GHz
Insertion Loss	2.2dB max.
(excluding theoretical insertion loss 6.0dB)	
Amplitude Balance	±0.6dB max
Phase Balance	±6° max
VSWR(input port)	1.7:1 max
VSWR(output ports)	1.6:1 max
Isolation	14dB min
Impedance	50 Ohms
Power Rating(Forward)	10W
Power Rating(Reverse)	1W

Outline Drawing(mm[inch])

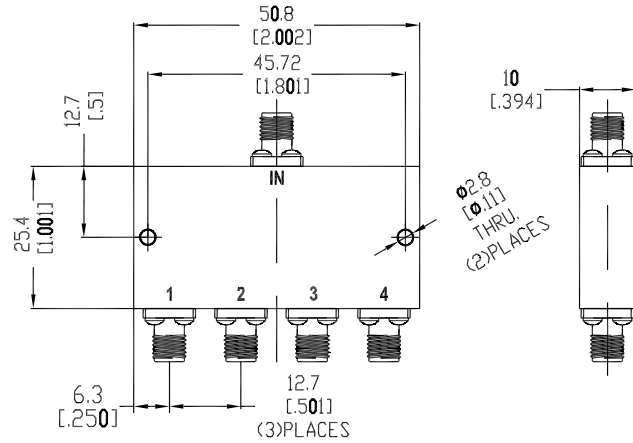

Mechanical & Environmental Characteristics

Dimensions	50.8 × 25.4 × 10mm
RF Connectors	2.92mm-Female
Surface Finishing	Black/Blue/Gray Paint
Operating Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Weight	40g