


TMPD2-00400200-150S

**0.4 to 2GHz, 150W, SMA-Female
2-WAY POWER DIVIDER**

Electrical Characteristics

Frequency Range 0.4~2GHz
Insertion Loss 0.4dB max
 (excluding theoretical insertion loss 3.0dB)
Amplitude Balance ± 0.25 dB max
Phase Balance $\pm 5^\circ$ max
VSWR(input port) 1.35:1 max
VSWR(output ports) 3.5:1 max
Isolation 4dB min
Impedance 50 Ohms
Power Handling 150W

Outline Drawing(mm)

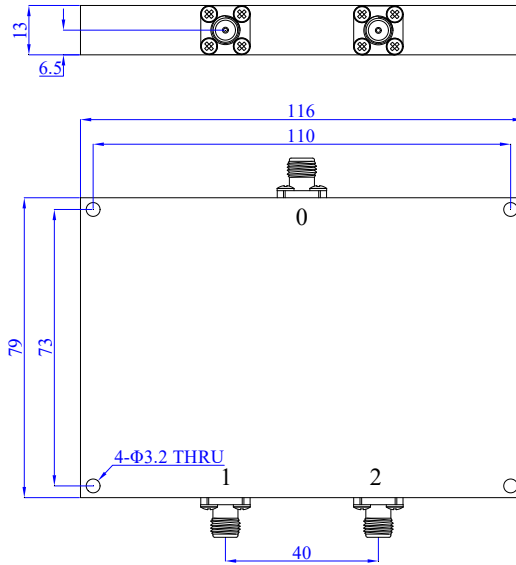

Mechanical & Environmental Characteristics

Dimensions 116 × 79 × 13mm
RF Connectors SMA-Female
Material Aluminum 6061
Surface Finishing Natural color conductive oxidation
Operating Temperature -40°C~+70°C