


PART NUMBER
TMPD16-15001700-15S

| REV. | DATE | COMMENTS | INITIAL |
|------|-----------|---------------------|---------|
| 1 | 2023/9/21 | ENGINEERING RELEASE | |

Specifications

| | |
|-------------------------|-----------------|
| Frequency Range | 15~17GHz |
| Insertion Loss | 15dB max |
| Input VSWR | 1.5:1 typ |
| Output VSWR | 1.5:1 typ |
| Isolation | 18dB min |
| Amplitude Balance | ± 1.0dB max |
| Phase Balance | ± 8° max |
| Impedance | 50 Ohms |
| Input/Output Connectors | SMA-Female |
| Power Rating | 15W |
| Operating Temperature | -30°C~+70°C |
| Storage Temperature | -55°C~+100°C |
| Surface Treatment | Black Painted |
| Dimensions | 208 × 60 × 10mm |

RoHS Compliant

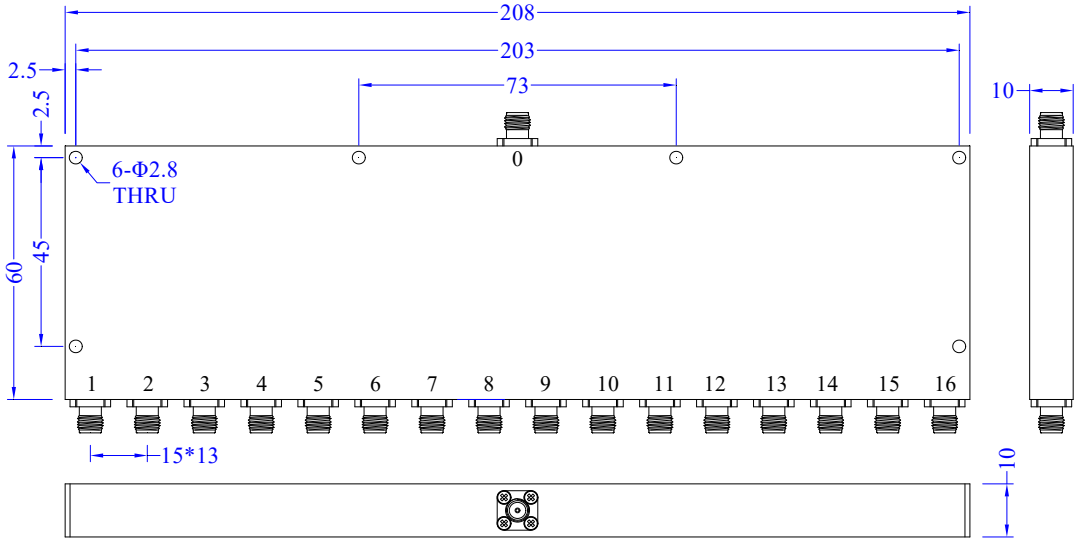

Drawing not to scale, units:mm



www.titan-microwave.com
Tel: +86 130 866 58398
Email: sales@titan-microwave.com
chris@titan-microwave.com

| | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|----------------------------------------------------------------------------------|
| PART NUMBER TMPD16-15001700-15S | | DESCRIPTION Power Divider, 16 Way, 15~17GHz 15W, SMA-Female |
| CAGE CODE | SIGNATURE <i>Chris Chen</i> | |
| EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS. | | |