


TMPD4-02001800-15S

**2 to 18 GHz, 15W, SMA-Female
4-WAY POWER DIVIDER**

Electrical Characteristics

Frequency Range 2~18GHz
Insertion Loss 3.0dB max
 (excluding theoretical insertion loss 6.0dB)
Amplitude Balance ± 0.5 dB max
Phase Balance $\pm 5^\circ$ max
VSWR(input port) 1.7:1 max
VSWR(output ports) 1.7:1 max
Isolation 17dB min
Impedance 50 Ohms
Power Handling 15W

Outline Drawing(mm)

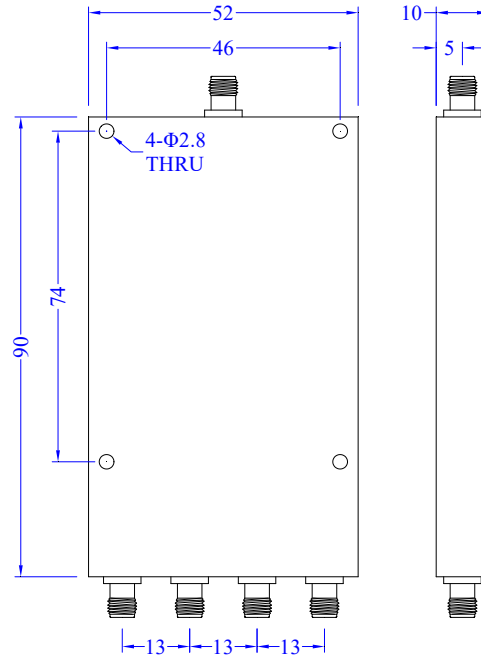

Mechanical & Environmental Characteristics

Dimensions 52 × 90 × 10mm
RF Connectors SMA-Female
Material Aluminum 6061
Surface Finishing Black Painted
Operating Temperature -40°C~+85°C
Storage Temperature -55°C~+100°C