


TMPD3-23002500-5K

**23 to 25 GHz, 5W, 2.92mm-Female
3-WAY POWER DIVIDER**

Electrical Characteristics

Frequency Range 23~25GHz
Insertion Loss 2.0dB max
 (excluding theoretical insertion loss 4.8dB)
Amplitude Balance ± 1.0 dB max
Phase Balance $\pm 10^\circ$ max
VSWR(input port) 1.5:1 max
VSWR(output ports) 1.5:1 max
Isolation 18dB min
Impedance 50 Ohms
Power Handling 5W

Outline Drawing(mm)

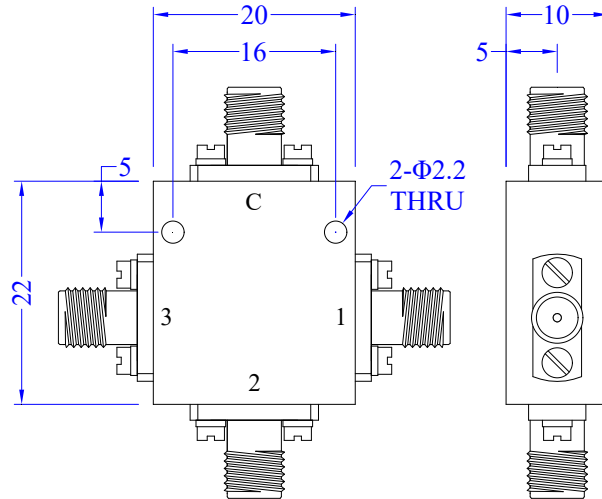

Mechanical & Environmental Characteristics

Dimensions 20 × 22 × 10mm
RF Connectors 2.92mm-Female
Material Aluminum 6061
Operating Temperature -40°C~+70°C
Storage Temperature -50°C~+85°C
Weight 20g