


PART NUMBER TMPD16-02200240-20S	REV.	DATE	COMMENTS	INITIAL
	1	2021/9/4	ENGINEERING RELEASE	

Specifications

Frequency Range	2200-2400MHz
Insertion Loss	1.2dB max
Nominal Splitter Loss	12.04dB typ
Input VSWR	1.4:1 max
Output VSWR	1.25:1 max
Isolation	20dB min
Amplitude Balance	± 0.6dB max
Phase Balance	± 8° max
Impedance	50 Ohms
Forward Power	20W max
Reverse Power	1W max
Input/Output Connectors	SMA-Female(stainless steel)
Operating Temperature	-40°C~+85°C
Storage Temperature	-55°C~+100°C
Surface Treatment	Black/Blue/Gray Painted
Dimensions	212 × 67 × 12.7mm

RoHS Compliant

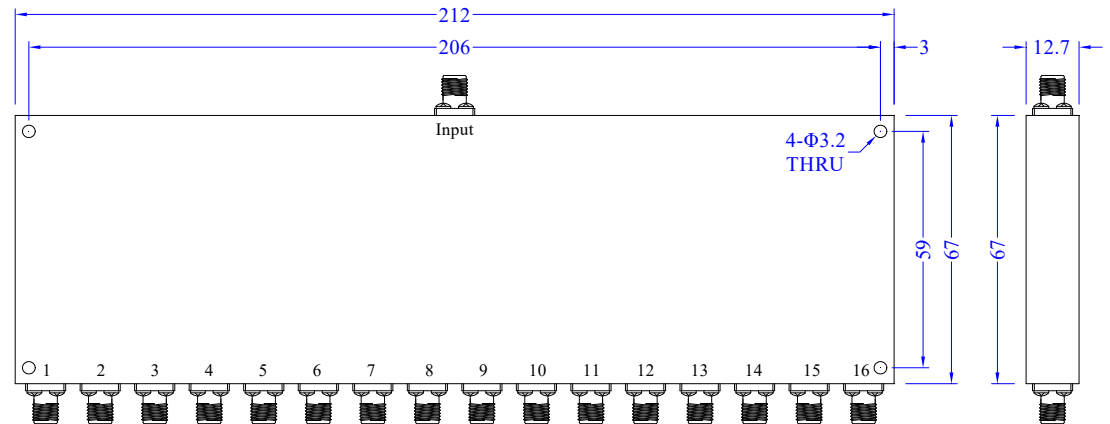

Drawing not to scale, units:mm



www.titan-microwave.com
 Tel: +86 130 866 58398
 Email: sales@titan-microwave.com
 chris@titan-microwave.com

PART NUMBER TMPD16-02200240-20S		DESCRIPTION Power Divider, 16 Way, 2200-2400MHz 20W, SMA-Female
CAGE CODE	SIGNATURE <i>Chris Chen</i>	
EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.		