

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/3/20	C. Chen

## TECHNICAL DATA

### ► Specifications(case temperature 25°C@32V)

Frequency Range	1-2GHz
Output Power	50dBm typ
Small Signal Gain	40±1.5dB max
Gain Flatness	±1.5dB typ
VSWR Input	1.4 min, 1.9 max
DC Voltage	+28V
Power Added Efficiency	35%
RF Connectors	SMA-Female
Operating Temperature	-45°C~+85°C
Storage Temperature	-55°C~+125°C


### ► Measurements Conditions

Temperature (DUT ON)	25°C ±1°C
Humidity	44%±10%
DUT Warm up time	30 min
DUT Miminum operation time	24 hours
Test equipment warm up time	2 hours
Additional temperature cycles in climatic chamber (DUT OFF)	-40°C~+85°C

### ► Absolute Maximum Ratings

DC Voltage	+35Vdc
Maximum Input Power(CW)	+20dBm
Operating Temp.(at case)	-40°C~+70°C
Storage Temperature	-55°C~+125°C

! Stress above these ratings may cause permanent damage to the device

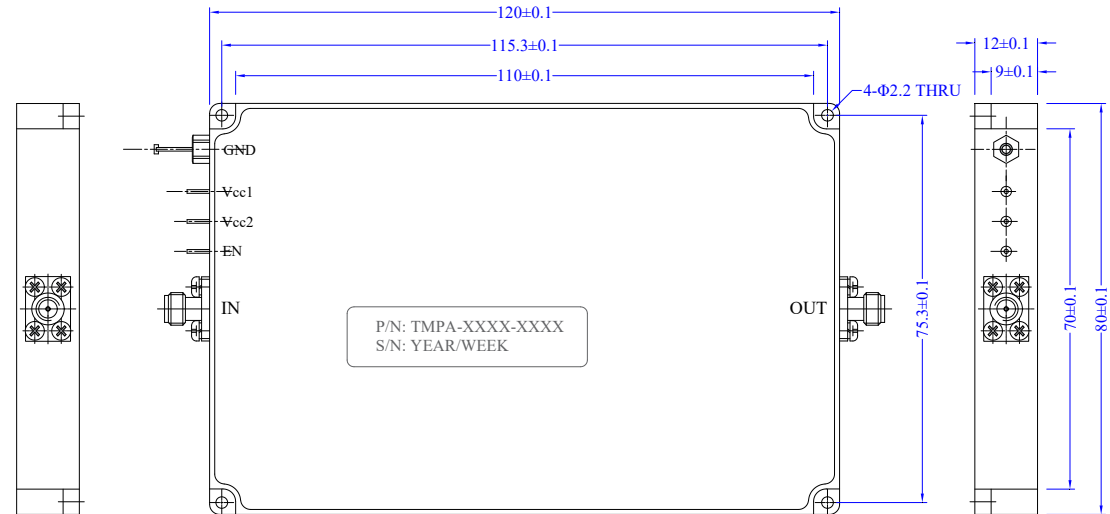

PIN Identifier	Specifications
IN	Signal Input
OUT	Power Output
GND	Ground
Vcc1	DC Supply +28V
Vcc2	DC Supply +28V
EN	Enable(can be use for pulse modulation)

DRAWN: L. Ma 20/03/22		
ENGINEER: J. Zhu 20/03/22		
APPROVED: C. Chen 20/03/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

**TITLE:**  
Power Amplifier, 1-2GHz,  
Gain 40dB, Output Power  
50dBm, +28V, SMA-  
Female

**PART No.:**  
TMPA-01000200-4050

**成都巨人微波**  
**TITAN MICROWAVE INC.**  
- A Professional RF & Microwave Components Supplier -

[www.titan-microwave.com](http://www.titan-microwave.com)



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------

#### Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY