

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/8/21	C. Chen

TECHNICAL DATA

► Specifications(case temperature 25°C@5V)

Frequency Range	0.2-2GHz
Output Power(P1dB)	13dBm typ
Gain	40±2.5dB max
Gain Flatness	±2.5dB typ
Noise Figure	1.8dB typ
VSWR Input	1.3 min, 1.8 max
VSWR Output	1.3 min, 1.8 max
DC Voltage	+5V typ
Current	150mA typ
Input/Output Connector	SMA-Female
Operating Temperature	-45°C~+85°C
Storage Temperature	-55°C~+125°C


► Measurements Conditions

Temperature (DUT ON)	25°C ±1°C
Humidity	44%±10%
DUT Warm up time	30 min
DUT Miminum operation time	24 hours
Test equipment warm up time	2 hours
Additional temperature cycles in climatic chamber (DUT OFF)	-40°C~+85°C

► Absolute Maximum Ratings

DC Voltage	+5.5Vdc
Maximum Input Power(CW)	+10dBm
Operating Temp.(at case)	-40°C~70°C
Storage Temperature	-55°C~+125°C

! Stress above these ratings may cause permanent damage to the device

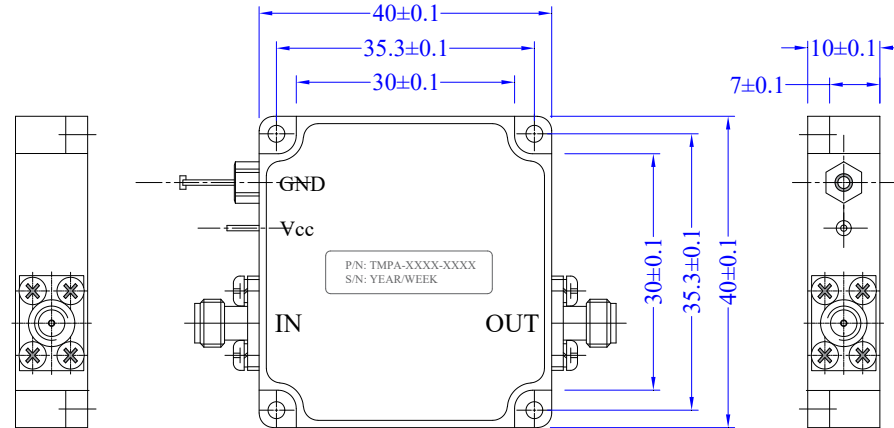

PIN Identifier	Specifications
IN	Signal Input
OUT	Power Output
GND	Ground
Vcc	DC Supply +5V

DRAWN: L. Ma 21/08/22		
ENGINEER: J. Zhu 21/08/22		
APPROVED: C. Chen 21/08/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
Low Noise Amplifier, 0.2-2GHz, Gain 40dB, P1dB 13dBm, Noise Figure 1.8dB, +5V, SMA-Female

PART No.:
TMLA-00200200-4013-18

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY