

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/4/11	C. Chen

TECHNICAL DATA

► Electrical Data

Frequency Range	1000~3000MHz
Max Output Power(Psat, CW)	≥50dBm
Gain	≥50dB
Gain Flatness	≤2±1dB
VSWR Input	≤2.0
Input Power	2±1dBm
Max Input Power	+10dBm
Spurious	≤-65dBc
Harmonic	≥-15dBc
Impedance	50 Ohms
PTT Port	Default OFF, 5V ON
Temperature Protection	Over 80°C protection with open circuit protection
Operation Current	≤10-12A
VCC/Current Reference	+28V~+32V/15A
Max Operation Voltage	+33V


► Mechanical Data

Dimensions	238×128×26.3mm
Input Connector	SMA-Female(right angle)
Output Connector	SMA-Female
32V Power Supply Interface	4.2mm Double Row 5P Female Connector
Package	1 piece/box
Weight	≤2kg

► Environmental Data

Operating Temperature	-25°C~+55°C
-----------------------	-------------

! Stress above these ratings may cause permanent damage to the device
Radiator/Heatsink required during operation or test

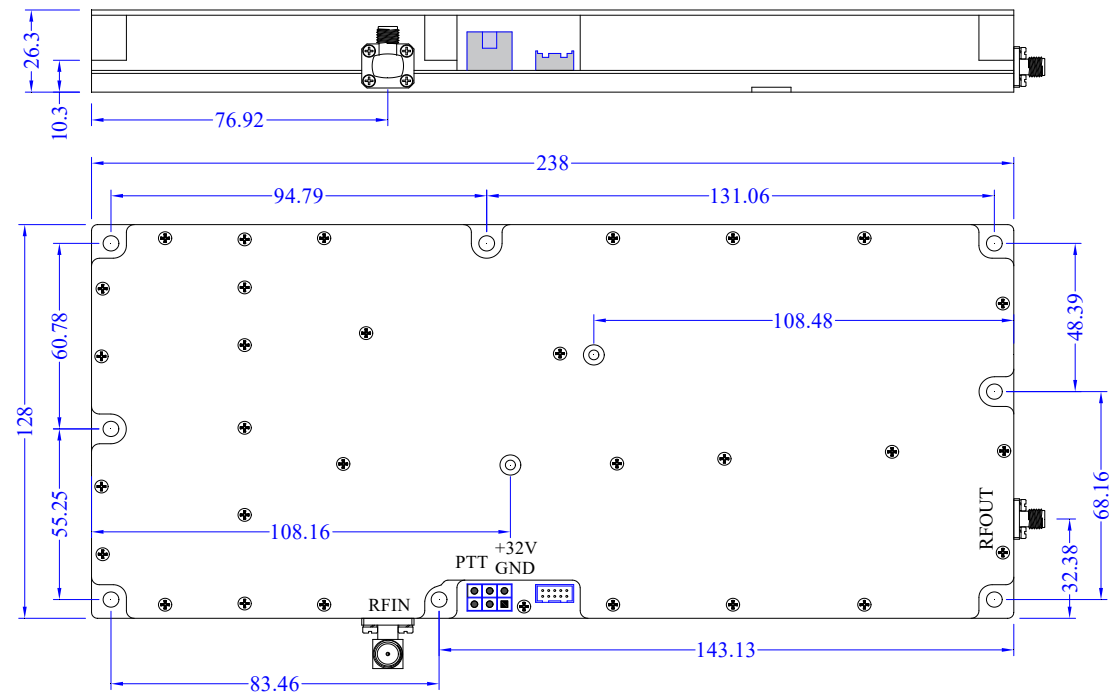

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 11/04/22		
ENGINEER: J. Zhu 11/04/22		
APPROVED: C. Chen 11/04/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
Power Amplifier, 1-3GHz,
Gain 50dB, Output Power
100W, +32V, SMA-
Female

PART No.:
TMPA-01000300-5050

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
--------------------	---------------	----------------------	------------------