

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/4/11	C. Chen

## TECHNICAL DATA

### ► Electrical Data

Frequency Range	1000~2500MHz
Max Output Power(Psat, CW)	≥50±0.5dBm
Gain	≥50dB
Gain Flatness	≤2±1dB
VSWR Input	≤1.6
Input Power	2±1dBm
Max Input Power	+10dBm
Spurious	≤-65dBc
Harmonic	≥-12dBc
Impedance	50 Ohms
PTT Port	Default OFF, 5V ON
Temperature Protection	Over 80°C protection with open circuit protection
Operation Current	≤12A
VCC/Current Reference	+32V/16A
Max Operation Voltage	+33V


### ► Mechanical Data

Dimensions	238×128×26.3mm
Input Connector	SMA-Female(right angle)
Output Connector	SMA-Female
32V Power Supply Interface	4.2mm Double Row 5P Female Connector
Package	1 piece/box
Weight	≤2kg

### ► Environmental Data

Operating Temperature	-25°C~+55°C
-----------------------	-------------

! Stress above these ratings may cause permanent damage to the device  
Radiator/Heatsink required during operation or test

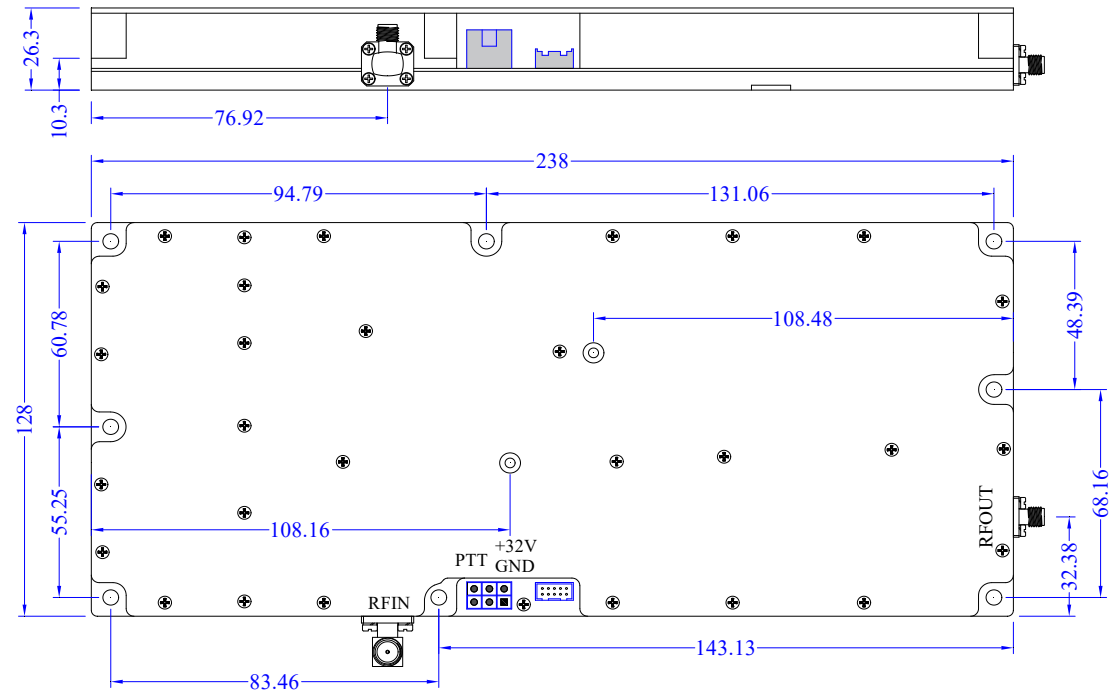

#### Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 11/04/22		
ENGINEER: J. Zhu 11/04/22		
APPROVED: C. Chen 11/04/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

#### TITLE:

Power Amplifier, 1-  
2.5GHz, Gain 50dB,  
Output Power 100W,  
+32V, SMA-Female

#### PART No.:

TMPA-01000250-5050



[www.titan-microwave.com](http://www.titan-microwave.com)



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------