

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/4/22	C. Chen

TECHNICAL DATA

Electrical Data

Frequency Range	100-3000MHz
Max Output Power(Psat, CW)	≥43±1dBm
Gain	≥45dB
Gain Flatness	≤7±2dB
VSWR Input	≤2.5
Input Power	4±3dBm
Max Input Power	+12dBm
Spurious	≤-65dBc
Harmonic	≥-8dBc
Impedance	50 Ohms
PTT Port	Default OFF, 3.3-5V ON
Temperature Protection	Over 80°C protection with open circuit protection
Operation Current	≤3.6A
VCC/Current Reference	+28V/6A
Max Operation Voltage	+31V


Mechanical Data

Dimensions	210×101.3×28.5mm
Input Connector	SMA-Female
Output Connector	SMA-Female
28V Power Supply Interface	Feedthru Capacitor
Package	1 piece/box

Environmental Data

Operating Temperature	-25°C~+55°C
-----------------------	-------------

! Stress above these ratings may cause permanent damage to the device
Radiator/Heatsink required during operation or test

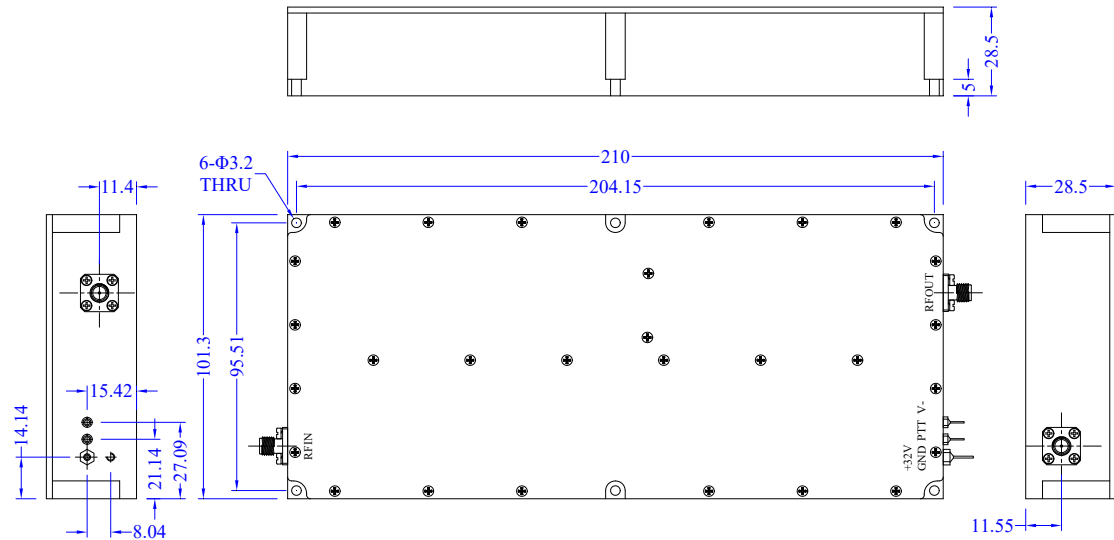

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 22/04/22		
ENGINEER: J. Zhu 22/04/22		
APPROVED: C. Chen 22/04/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:

Power Amplifier, 0.1-3GHz, Gain 45dB, Output Power 43dBm, +28V, SMA-Female

PART No.:

TMPA-00100300-4543

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------