

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/11/20	C. Chen

TECHNICAL DATA

Electrical Data

Frequency Range	500~2000MHz
Max Output Power(Psat)	≥47dBm
Gain	≥46dB
Gain Flatness	≤4±2dB
VSWR Input	≤2.6
Input Power	4±2dBm
Max Input Power	+12dBm
Spurious	≤-65dBc
Harmonic	≥-10dBc
Impedance	50 Ohms
PTT Port	Default OFF, 3.3~5V ON
Temperature Protection	Over 80℃ protection with open circuit protection
Operation Current	≤5~7A
VCC/Current Reference	+28V/12A


Mechanical Data

Dimensions	210×101.3×28.5mm
Input Connector	SMA-Female
Output Connector	SMA-Female
28V Power Supply Interface	Feedthru Capacitor

Environmental Data

Operating Temperature	-25℃~+55℃
-----------------------	-----------

! Stress above these ratings may cause permanent damage to the device
Radiator/Heatsink required during operation or test

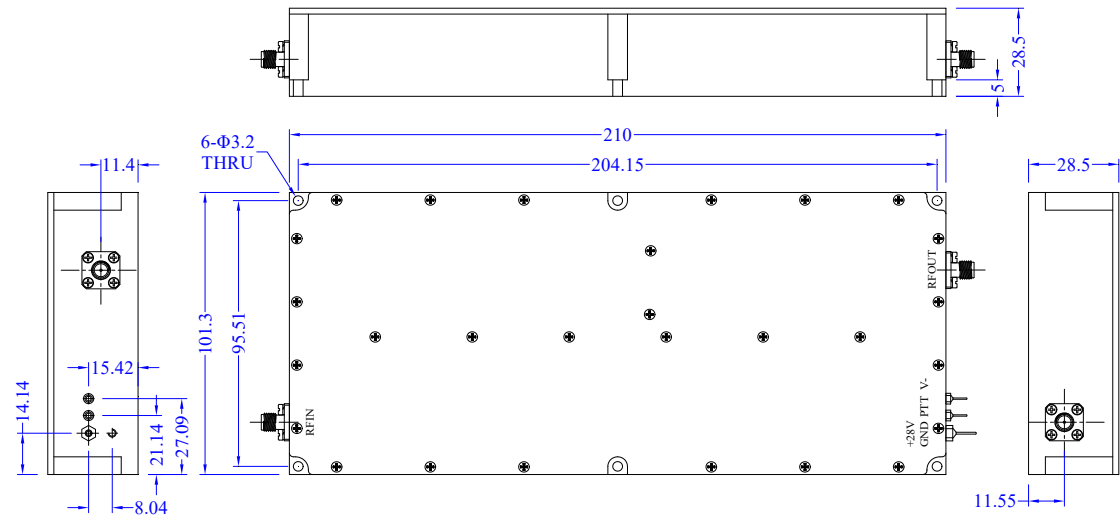

DRAWN: L. Ma 20/11/22		
ENGINEER: J. Zhu 20/11/22		
APPROVED: C. Chen 20/11/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
Power Amplifier, 0.5-
2GHz, Gain 46dB, Output
Power 47dBm, +28V,
SMA-Female

PART No.:
TMPA-00500200-4647

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY