

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/8/11	C. Chen

### TECHNICAL DATA

#### Electrical Data(50Ω, 25°C)

Frequency Range	0.02~1GHz
Output Power(CW)	44dBm min, 45dBm typ
Output Power(P1dB)	43dBm typ
Gain	43dB min, 45dB typ
Gain Flatness	±3.0dB typ
Gain Variation@-30°C~+70°C	±3.0dB typ
Input VSWR	1.5:1 typ
Max Input Power	+3dBm
Harmonic	-10dBc typ
IMD3, 2-Tone(35dBm/Tone)	-25dBc typ(1MHz Spacing)
Spurious	-60dBc max
Isolation	-50dB typ
Operating Voltage	+26V~+30V
Operating Current(VCC=28V)	1A typ, 6A max


#### Mechanical Data

Dimensions	170×80×20mm
Input Connector	SMA-Female
Output Connector	SMA-Female
DC Power/Interface Connector	9-Pin D-Sub

#### Environmental Data

Operating Temperature	-30°C~+60°C
Storage Temperature	-50°C~+105°C

! Stress above these ratings may cause permanent damage to the device  
 Radiator/Heatsink required during operation or test(optional)

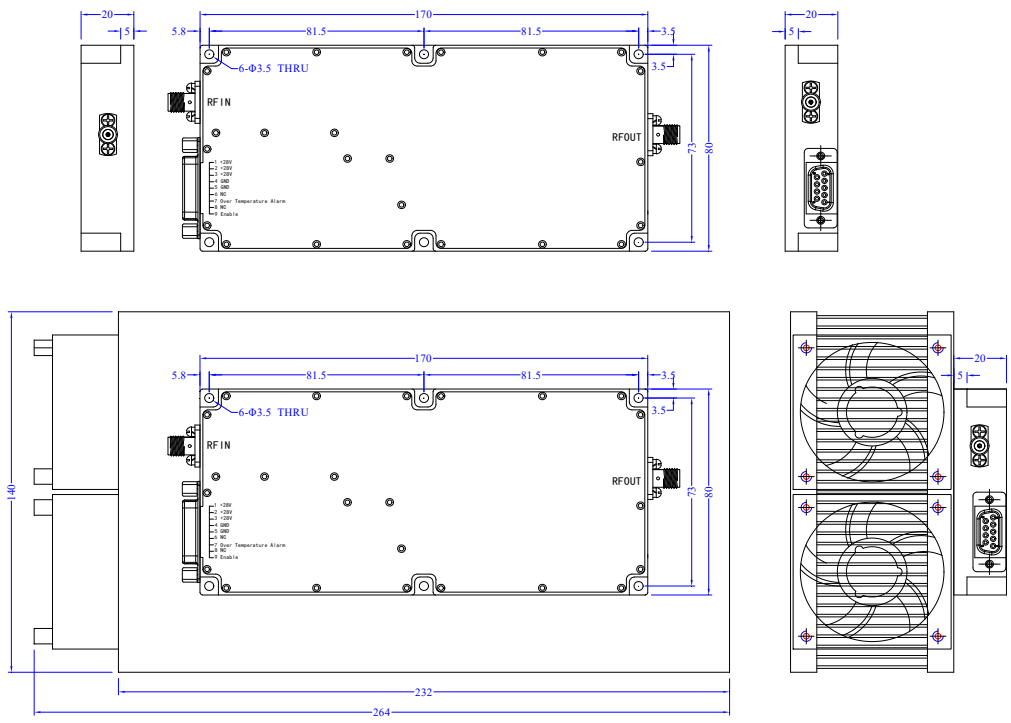


Pin	Name	Function	Specifications
1,2,3	VCC	Power Supply	+26~+30V
4,5	GND	Power Supply	Ground
6	NC	Output	-
7	Temp Alarm	Output	When the temperature of the case exceeds 70°C, PA will turn off and this pin will be pulled high. If the temperature of case drops to 60°C, PA will turn to normal operation, and this pin will be pulled low.
8	NC	Input	-
9	Enable	Input	Amplifier Enable:TTL High(5V)(Internally Pulled-High)

- Notes:
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
  - CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 11/08/23		
ENGINEER: J. Zhu 11/08/23		
APPROVED: C. Chen 11/08/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	


**TITLE:**  
 Power Amplifier, 0.02-1GHz, Gain 45dB, Output Power 45dBm, +28V, SMA-Female

**PART No.:**  
 TMPA-00020100-4545



**成都巨人微波**  
**TITAN MICROWAVE INC.**  
 - A Professional RF & Microwave Components Supplier -

[www.titan-microwave.com](http://www.titan-microwave.com)



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------