

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/8/11	C. Chen

TECHNICAL DATA

► Electrical Data(50Ω, 25°C)

Frequency Range	0.02~1GHz
Output Power(CW)	51dBm min, 52dBm typ
Output Power(P1dB)	47dBm typ
Gain	47dB min, 50dB typ
Gain Flatness	±2.0dB typ
Gain Variation@-30°C~+70°C	±3.0dB typ
Input VSWR	1.5:1 typ
Max Input Power	+3dBm
Harmonic	-10dBc typ
IMD3, 2-Tone(44dBm/Tone)	-30dBc typ(1MHz Spacing)
Spurious	-60dBc max
Isolation	-50dB typ
Operating Voltage	+30V~+34V
Operating Current(VCC=32V)	2.5A typ, 20A max


► Mechanical Data

Dimensions	170×80×20mm
Input Connector	SMA-Female
Output Connector	SMA-Female
DC Power/Interface Connector	9-Pin D-Sub

► Environmental Data

Operating Temperature	-30°C~+60°C
Storage Temperature	-50°C~+105°C

! Stress above these ratings may cause permanent damage to the device
 Radiator/Heatsink required during operation or test(optional)

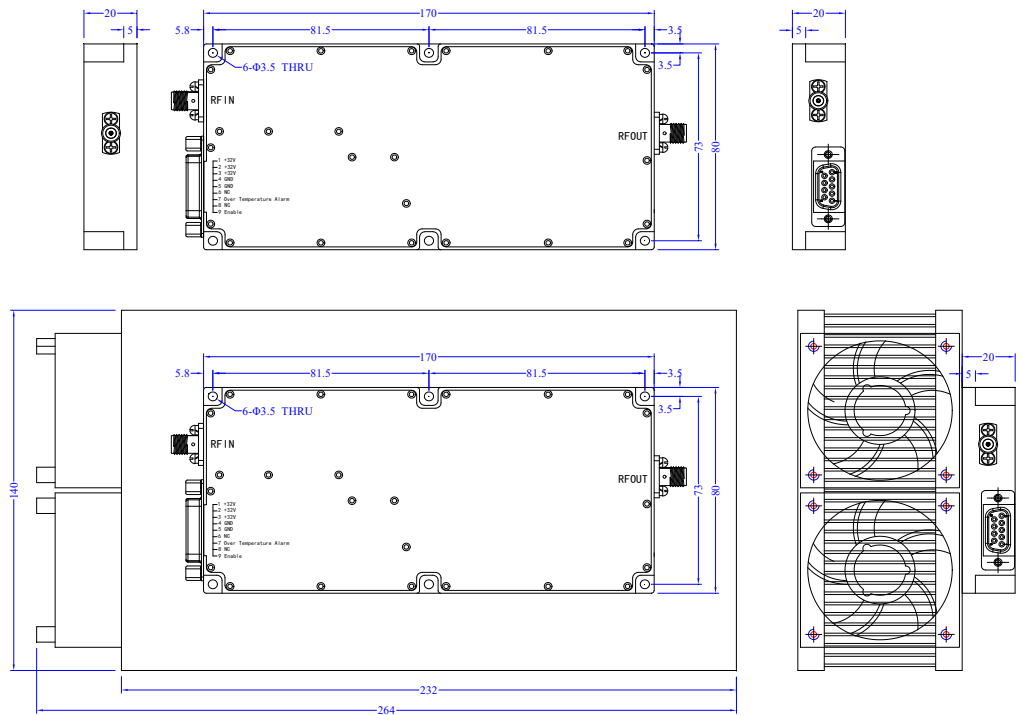


DC Power Connector, 9-Pin D-Sub, Female			
Pin	Name	Function	Specifications
1,2,3	VCC	Power Supply	+30~+34V
4,5	GND	Power Supply	Ground
6	NC	Output	-
7	Temp Alarm	Output	When the temperature of the case exceeds 70°C, PA will turn off and this pin will be pulled high. If the temperature of case drops to 60°C, PA will turn to normal operation, and this pin will be pulled low.
8	NC	Input	-
9	Enable	Input	Amplifier Enable:TTL High(5V)(Internally Pulled-High)

- Notes:
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 - CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 11/08/23		
ENGINEER: J. Zhu 11/08/23		
APPROVED: C. Chen 11/08/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	


TITLE:
 Power Amplifier, 0.02-1GHz, Gain 50dB, Output Power 52dBm, +32V, SMA-Female

PART No.:
 TMPA-00020100-5052



成都巨人微波
TITAN MICROWAVE INC.
 - A Professional RF & Microwave Components Supplier -

www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------