

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/5/7	C. Chen

## TECHNICAL DATA

### ► Electrical Data(50Ω, 25°C)

Frequency Range	2~6GHz
Output Power(CW)	47dBm min, 48dBm typ
Gain	47dB min, 48dB typ
Gain Flatness	±3.0dB typ, ±4.0dB max
Gain Variation@-30°C~+65°C	±3.0dB typ
Input VSWR	1.5:1 typ
Max Input Power	+5dBm
Harmonic	-10dBc typ
Spurious	-60dBc max
Isolation	-65dB typ
IMD3, 2-Tone@40dBm/Tone	-20dBc typ (1MHz spacing)
Operating Voltage	+32V typ, +34V max
Operating Current	2A typ, 10A max


### ► Mechanical Data

Dimensions	200×120×25mm
Input Connector	SMA-Female
Output Connector	SMA-Female
DC Power/Interface Connector	Feedthru Capacitor

### ► Environmental Data

Operating Temperature	-30°C~+60°C
Storage Temperature	-50°C~+105°C

! Stress above these ratings may cause permanent damage to the device  
Radiator/Heatsink required during operation or test(optional)

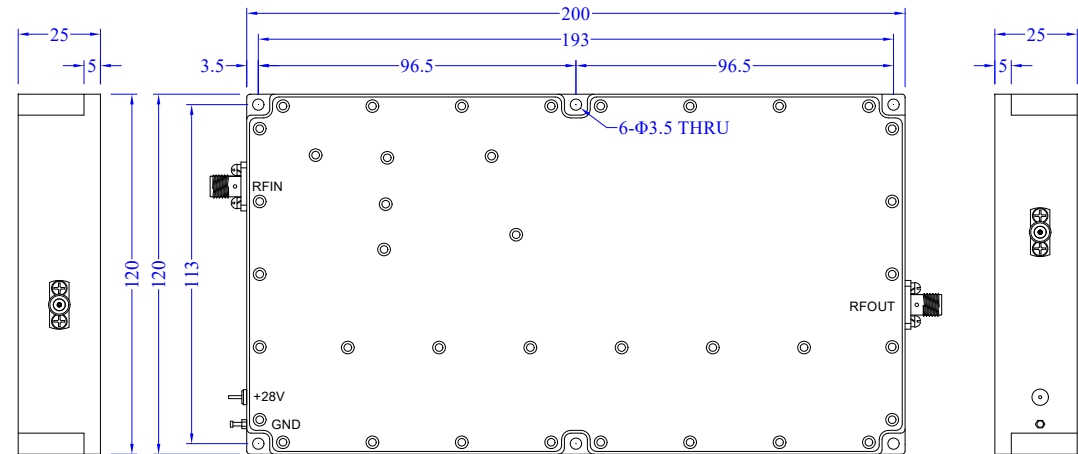

#### Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 07/05/23		
ENGINEER: J. Zhu 07/05/23		
APPROVED: C. Chen 07/05/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

#### TITLE:

Power Amplifier, 2-6GHz,  
Gain 48dB, Output Power  
48dBm, +32V, SMA-  
Female

#### PART No.:

TMPA-02000600-4848



[www.titan-microwave.com](http://www.titan-microwave.com)



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------