

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/9/5	C. Chen

## TECHNICAL DATA

### ► Electrical Data


Frequency Range	2000~4000MHz
Insertion Loss (excluding theoretical insertion loss 12.0dB)	1.6dB max
Isolation	18dB min
Input VSWR	1.50 max
Output VSWR	1.50 max
Amplitude Balance	±0.5dB max
Phase Balance	±6°
Forward Power	20W
Reverse Power	1W
Impedance	50 Ohms

### ► Mechanical Data

Dimensions	212×90×10mm
Input Connector	SMA-Female
Output Connectors	SMA-Female
Surface Finish	Grey/Black/Blue Painted

### ► Environmental Data


Operating Temperature	-45℃~+85℃
-----------------------	-----------

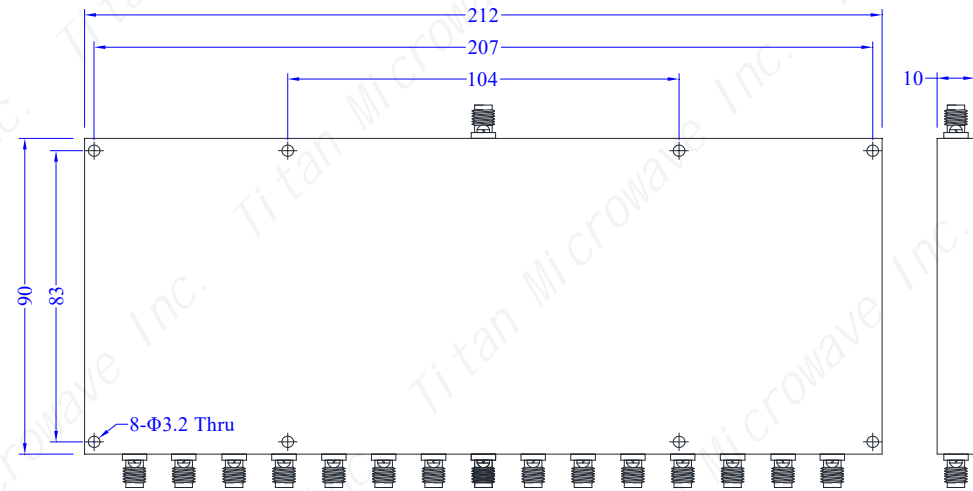

DRAWN: L. Ma 05/09/22		
ENGINEER: J. Zhu 05/09/22		
APPROVED: C. Chen 05/09/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

**TITLE:**  
Power Divider, 16-Way,  
2-4GHz, 20W, SMA-  
Female

**PART No.:**  
TMPD16-02000400-20S

 <b>成都巨人微波</b> <b>TITAN MICROWAVE INC.</b> <small>- A Professional RF &amp; Microwave Components Supplier -</small>			
<a href="http://www.titan-microwave.com">www.titan-microwave.com</a>			
		DIMENSIONS IN MILLIMETERS(mm)	
<b>SIZE:</b> A4	<b>SCALE:</b>	<b>SHEET:</b> 1/1	<b>REV:</b> A

**Notes:**

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY