

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/6/15	C. Chen

## TECHNICAL DATA

### ► Electrical Data


Frequency Range	500~8000MHz
Insertion Loss (excluding theoretical insertion loss 10.8dB)	3.5dB max
Isolation	15dB min
Input VSWR	2.00 max
Output VSWR	1.60 max
Amplitude Balance	±1.0dB max
Phase Balance	±10°
Forward Power	20W
Reverse Power	1W
Impedance	50 Ohms

### ► Mechanical Data

Dimensions	182×162×10mm
Input Connector	SMA-Female
Output Connectors	SMA-Female
Surface Finish	Grey/Black/Blue Painted

### ► Environmental Data

Operating Temperature	-45℃~+85℃
-----------------------	-----------

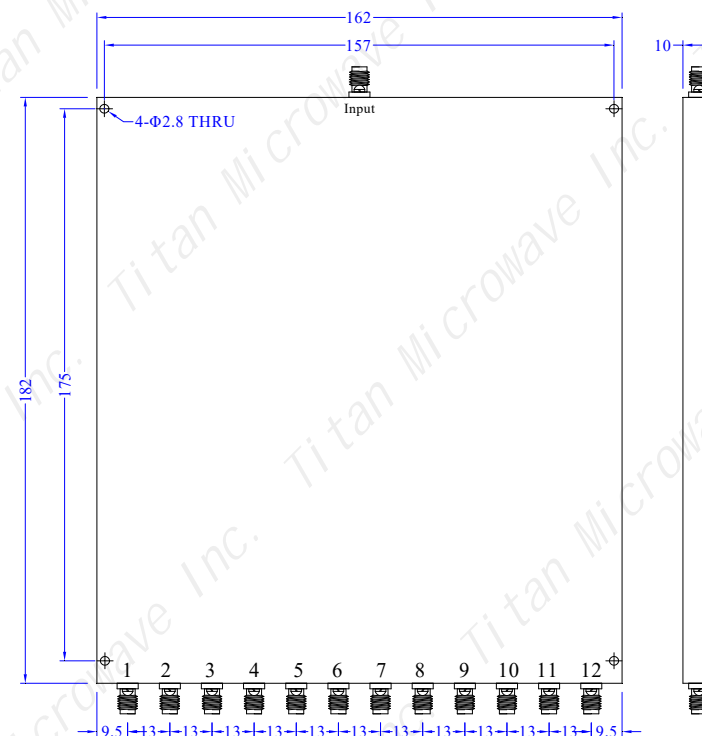

#### Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 15/06/22		
ENGINEER: J. Zhu 15/06/22		
APPROVED: C. Chen 15/06/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		

x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

#### TITLE:

Power Divider, 12-Way,  
0.5-8GHz, 20W, SMA-  
Female

#### PART No.:

TMPD12-00500800-20SB



[www.titan-microwave.com](http://www.titan-microwave.com)



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------