

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Dai	2023/8/19	C. Chen

## TECHNICAL DATA

### ► Electrical Data


Frequency Range	0.5-8GHz
Dynamic Range	-20dBm min, +20dBm max
VSWR	1.4 typ, 1.8 max
Sensitivity	500mV/mW typ
Flatness	±2dB typ
Response Time	100ns typ
Polarity	Positive

### ► Mechanical Data

Input Connector	SMA-Male
Output Connector	SMA-Female
Body	Gold Plated

### ► Environmental Data

Operating Temperature	-40°C~+70°C (design assurance)
-----------------------	--------------------------------

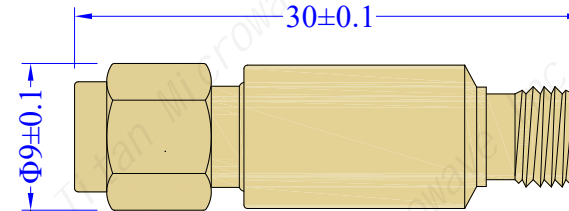

#### Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 19/08/23		
ENGINEER: J. Zhu 19/08/23		
APPROVED: C. Chen 19/08/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

**TITLE:**  
Coaxial Detector, 0.5-8GHz, SMA-Male to SMA-Female, Positive Polarity

**PART No.:**  
TMDT-058-SP



[www.titan-microwave.com](http://www.titan-microwave.com)



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------